

SASSO 40 round wallwasher/floor

trim 2 lamps


048-2840014W 048-2898317 002-90744



Project / Type

Notes

Count / Date

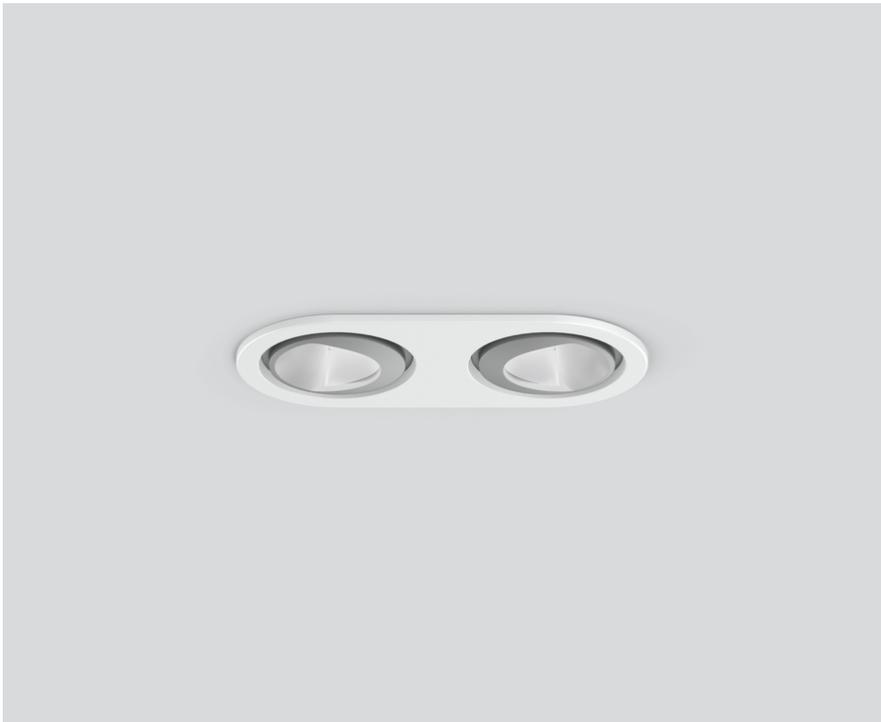

General

Ceiling , Recessed

rotation 360°

matt silver

traffic white

IP20

1620 lm

fixture 116 lm/W¹

LED

3000 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 99 , R_r: 91 , R₍₁₋₁₅₎: 89

MR 0.61

MDER 0.55

Optical

wallwasher floor

beam angle 53°

P_{stLM} ≤ 1.0²

SVM ≤ 0.4²

Electrical

non DIM

220-240 V

system 16.4 W

fixture 6.9 W

36 Vf

200 mA

fixture 13.9 W

PC2

Physical

trim

length 122 mm

width 60 mm

height 51 mm

0.19 kg

Cutout

diameter 56 mm

length 114 mm

width 114 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 100 mm


Round recessed spotlight in die-cast aluminium; 2 lamps; surface matt silver; 360° rotatable; , installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

100
non DIM
120
DALI-2
56 x 114



¹ incl. consideration of optical losses & internal control unit losses

² Value of containing product at full load (undimmed)

SASSO 40 round wallwasher/floor

trim 2 lamps

048-2840014W 048-2898317 002-90744



Project / Type

Notes

Count / Date

**Installation
instructions**



**Lighting
calculator**

