

SASSO 100 square wallwasher/floor

trim

048-2750919W 048-2797318 002-90789



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed	
gold , RAL 260-M ¹	
Mounting set jet black	
IP20	
2570 lm	
fixture 120 lm/W ²	

LED

2700 K	
CRI ≥ 90	
L80 / 50000 h	
initial MacAdam ≤ 2 SDCM	
R _g : 97 , R _f : 91 , R _{1-15} : 87	
MR 0.52	
MDER 0.47	

Optical

wallwasher floor	
PstLM ≤ 1.0 ³	
SVM ≤ 0.4 ³	

Electrical

DALI-2	
220-240 V	
system 25.2 W	
fixture 21.5 W	
36 Vf	
650 mA	
PC2	

Physical


trim	
length 118 mm	
width 118 mm	
height 96 mm	
0.73 kg	

Cutout


length 112 mm	
width 112 mm	
min. ceiling thickness 2 mm	
max. ceiling thickness 25 mm	
recessed depth 100 mm	

¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)

Light distribution



Product drawing

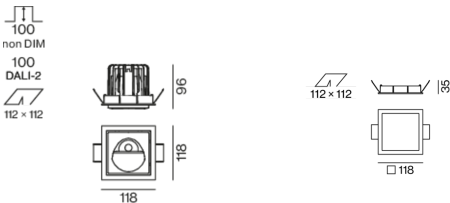

Installation instructions



Lighting calculator



[‘048-2750919W 048-2797318 002-90789’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com