

SASSO 100 round wallwasher/floor

trim

048-2740919W 048-2796317 002-90767



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

rotation 360°

gold , RAL 260-M ¹

Mounting set traffic white

IP20

1890 lm

fixture 130 lm/W²

LED

2700 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 97 , R_r: 91 , R₍₁₋₁₅₎: 87

MR 0.52

MDER 0.47

Optical

wallwasher floor

PstLM ≤ 1.0 ³

SVM ≤ 0.4 ³

Electrical

DALI-2

220-240 V

system 17.2 W

fixture 14.6 W

36 Vf

450 mA

PC2

Physical

trim

diameter 118 mm

height 96 mm

0.7 kg

Cutout


diameter 108 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 100 mm

Light distribution



Product drawing

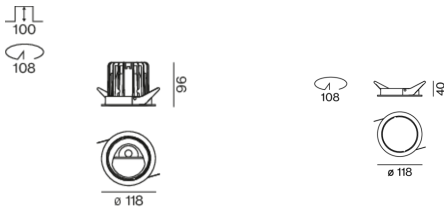

¹ RAL code
² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.
³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

