

# SASSO 100 round wallwasher/floor

trim 2 lamps

048-2740019W 048-279831G 002-90789



Project / Type	
Notes	
Count / Date	



## General

Ceiling , Recessed
rotation 360°
gold , RAL 260-M <sup>1</sup>
Mounting set white aluminium
IP20
5320 lm
fixture 124 lm/W <sup>2</sup>

## LED

3000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R <sub>g</sub> : 99 , R <sub>r</sub> : 90 , R <sub>t(1-5)</sub> : 87
MR 0.6
MDER 0.54

## Optical

wallwasher floor
PstLM ≤ 1.0 <sup>3</sup>
SVM ≤ 0.4 <sup>3</sup>

## Electrical

DALI-2
220-240 V
system 50 W
fixture 21.5 W
36 Vf
650 mA
fixture 43 W
PC2

## Physical


trim
length 218 mm
width 118 mm
height 96 mm
0.62 kg

## Cutout


diameter 105 mm
length 205 mm
width 105 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

Round recessed spotlight in die-cast aluminium; 2 lamps; surface gold; 360° rotatable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

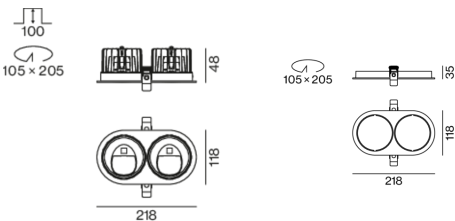

<sup>1</sup> RAL code

<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

<sup>3</sup> Value of containing product at full load (undimmed)



# SASSO 100 round wallwasher/floor

trim 2 lamps

048-2740019W 048-279831G 002-90789



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

