

# SASSO 60 square wallwasher/floor

trimless

048-2651219W 048-2697117 002-90762



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed  
gold , RAL 260-M<sup>1</sup>  
Mounting set traffic white  
IP20  
1050 lm  
fixture 118 lm/W<sup>2</sup>

## LED

3500 K  
CRI ≥ 90  
L85 / 50000 h  
initial MacAdam ≤ 3 SDCM  
R<sub>g</sub>: 96 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 91  
MR 0.74  
MDER 0.67

## Optical

wallwasher floor  
PstLM ≤ 1.0<sup>3</sup>  
SVM ≤ 0.4<sup>3</sup>

## Electrical

DALI-2  
220-240 V  
system 10.4 W  
fixture 8.9 W  
36 Vf  
250 mA  
PC2  
1 DALI Addr.

## Physical


trimless  
length 72 mm  
width 72 mm  
height 48 mm  
0.28 kg

## Cutout


length 73 mm  
width 73 mm  
min. ceiling thickness 12.5 mm  
max. ceiling thickness 25 mm  
recessed depth 105 mm

Recessed square spotlight in die-cast aluminium; 1 lamp; surface gold; installation without tools in mounting set due to patented ball catch system; square installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

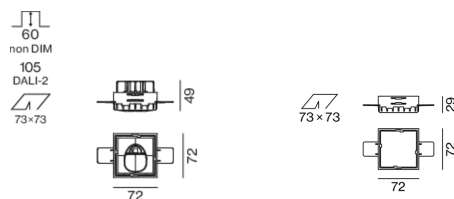

# SASSO 60 square wallwasher/floor

trimless

048-2651219W 048-2697117 002-90762



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

