

# SASSO 60 square wallwasher

trim 2 lamps

048-2651919A 048-2699317 002-90771



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed  
gold , RAL 260-M<sup>1</sup>  
Mounting set traffic white  
IP20  
1120 lm  
fixture 69 lm/W<sup>2</sup>

## LED

2700 K  
CRI ≥ 90  
L90 / 50000 h  
initial MacAdam ≤ 3 SDCM  
R<sub>g</sub>: 101 , R<sub>r</sub>: 91 , R<sub>(1-5)</sub>: 89  
MR 0.56  
MDER 0.51

## Optical

wallwasher  
PstLM ≤ 1.0<sup>3</sup>  
SVM ≤ 0.4<sup>3</sup>

## Electrical

non DIM  
220-240 V  
system 19.0 W  
fixture 8.1 W  
36 Vf  
250 mA  
fixture 16.2 W  
PC2

## Physical

trim  
length 147 mm  
width 81 mm  
height 48 mm  
0.16 kg

## Cutout

length 138 mm  
width 73 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 90 mm

<sup>1</sup> RAL code


<sup>2</sup> incl. consideration of optical losses & internal control unit losses

<sup>3</sup> Value of containing product at full load (undimmed)

## Installation instructions




## Lighting calculator

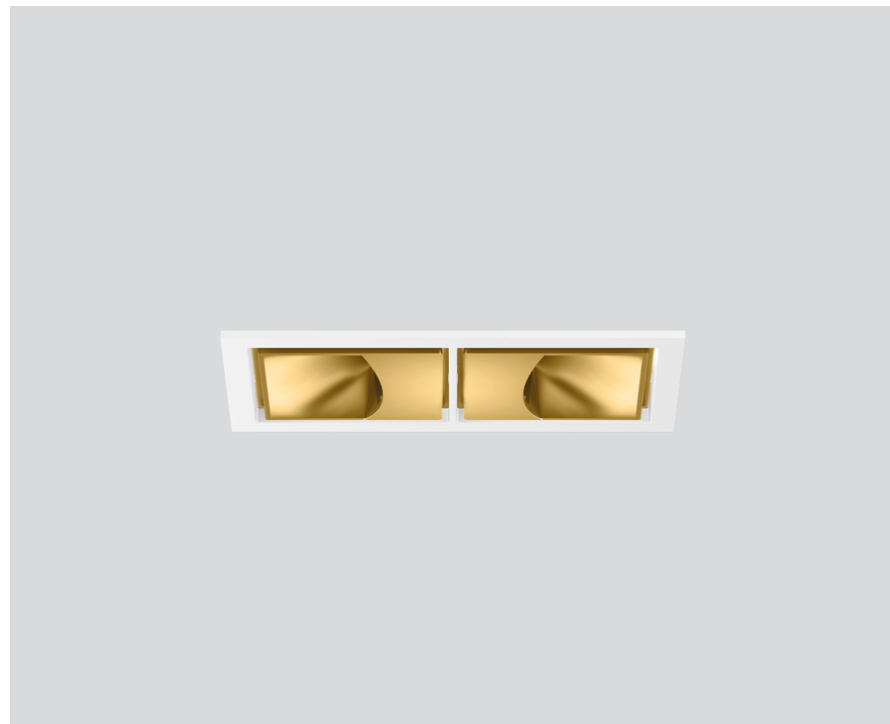


Recessed square spotlight in die-cast aluminium; 2 lamps; surface gold; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

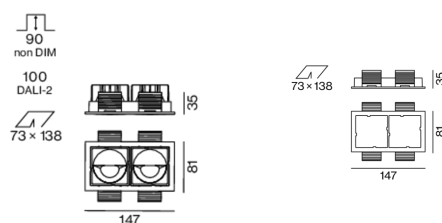

[048-2651919A 048-2699317 002-90771] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

15.04.2025

1 / 2

# SASSO 60 square wallwasher

trim 2 lamps

048-2651919A 048-2699317 002-90771



Project / Type

Notes

Count / Date

## Maintenance Factors

| Operating Time [h] | 10 000                       | 20 000 | 30 000  | 40 000 | 50 000 |
|--------------------|------------------------------|--------|---|--------|--------|
| LLMF               | 0.96                         | 0.95   | 0.94  | 0.93   | 0.92   |
| LSF                | 1                            | 1      | 1   | 1      | 1      |
| MF                 | LMF × RSMF × LLMF × LSF      |        | RSMF <sup>a</sup> Room Surface Maintenance Factor |        |        |
| MF                 | Maintenance Factor           |        | LLMF Lamp Lumens Maintenance Factor               |        |        |
| LMF <sup>a</sup>   | Luminaire Maintenance Factor |        | LSF Lamp Survival Faktor                          |        |        |

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 57                 |
| B13                            | 75                 |
| B16                            | 92                 |
| B20                            | 115                |
| C10                            | 57                 |
| C13                            | 75                 |
| C16                            | 92                 |
| C20                            | 115                |

## Components

### MOUNTING SET with trim 2 lamps

|                                   |                         |                         |                                  |
|-----------------------------------|-------------------------|-------------------------|----------------------------------|
| TYPE<br>for intermediate ceilings | COLOUR<br>traffic white | L-W-H (MM)<br>147-81-35 | ARTICLE NUMBER(S)<br>048-2699317 |
|-----------------------------------|-------------------------|-------------------------|----------------------------------|



### POWER SUPPLY

|              |                        |                                |
|--------------|------------------------|--------------------------------|
| TYPE<br>13 W | L-W-H (MM)<br>85-40-22 | ARTICLE NUMBER(S)<br>002-90771 |
|--------------|------------------------|--------------------------------|



## Mounting accessories

### THROUGH WIRING CONNECTION BOX

|   |                                      |   |
|---|--------------------------------------|---|
| TYPE<br>non DIM cable ø 4 – 12 mm, Linect®-Ready<br>DALI cable ø 4 – 12 mm, Linect®-Ready | L-W-H (MM)<br>105-58-30<br>105-58-30 | ARTICLE NUMBER(S)<br>005-2531110<br>005-2551110 |
|---|--------------------------------------|---|



## Optional electrical accessories

### DIN RAIL POWER SUPPLY

|               |                        |                                  |
|---------------|------------------------|----------------------------------|
| TYPE<br>160 W | L-W-H (MM)<br>72-90-63 | ARTICLE NUMBER(S)<br>005-6520210 |
|---------------|------------------------|----------------------------------|



### DIN RAIL LED DRIVER

|  |                        |                                  |
|--|------------------------|----------------------------------|
| TYPE<br>DALI-2   200-1050 mA   2 x 42W | L-W-H (MM)<br>36-88-59 | ARTICLE NUMBER(S)<br>005-6121030 |
|--|------------------------|----------------------------------|

