

SASSO 60 square wallwasher/floor

trim

048-2651917W 048-269731G 002-90762



Project / Type _____


Notes _____

Count / Date _____




Recessed square spotlight in die-cast aluminium; 1 lamp; surface white; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

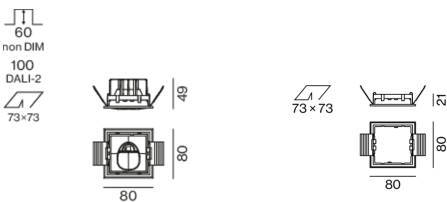

General

Ceiling , Recessed _____

white , RAL 9016 ¹ _____

Mounting set white aluminium _____

IP20 _____

1010 lm _____

fixture 115 lm/W² _____

LED

2700 K _____

CRI ≥ 90 _____

L85 / 50000 h _____

initial MacAdam ≤ 3 SDCM _____

R_g: 101 , R_f: 90 , R_{f(1-5)}: 88 _____

MR 0.51 _____

MDER 0.46 _____

Optical

wallwasher floor _____

PstLM ≤ 1.0 ³ _____

SVM ≤ 0.4 ³ _____

Electrical

DALI-2 _____

220-240 V _____

system 10.4 W _____

fixture 8.9 W _____

36 Vf _____

250 mA _____

PC2 _____

1 DALI Addr. _____

Physical

trim _____

length 80 mm _____

width 80 mm _____

height 48 mm _____

0.28 kg _____

Cutout

length 73 mm _____

width 73 mm _____

min. ceiling thickness 2 mm _____

max. ceiling thickness 25 mm _____

recessed depth 100 mm _____

¹ RAL code

² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

³ Value of containing product at full load (undimmed)



SASSO 60 square wallwasher/floor

trim

048-2651917W 048-269731G 002-90762



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

