

SASSO 60 square wallwasher

trim 2 lamps


048-2651217A 048-2699318 002-90771



Project / Type

Notes

Count / Date

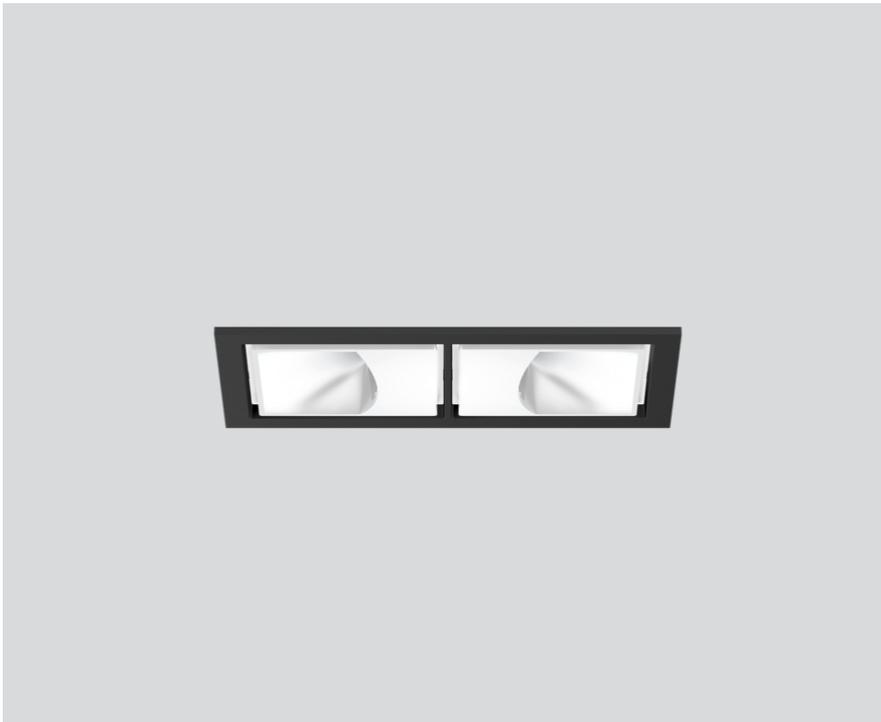

General

Ceiling , Recessed
 white , RAL 9016 ¹
 Mounting set jet black
 IP20
 1290 lm
 fixture 80 lm/W²

LED

3500 K
 CRI ≥ 90
 L90 / 50000 h
 MR 0.82
 MDER 0.74

Optical

wallwasher
 PstLM ≤ 1.0 ³
 SVM ≤ 0.4 ³

Electrical

non DIM
 220-240 V
 system 19.0 W
 fixture 8.1 W
 36 Vf
 250 mA
 fixture 16.2 W
 PC2

Physical


trim
 length 147 mm
 width 81 mm
 height 48 mm
 0.16 kg

Cutout


length 138 mm
 width 73 mm
 min. ceiling thickness 2 mm
 max. ceiling thickness 25 mm
 recessed depth 90 mm

Recessed square spotlight in die-cast aluminium; 2 lamps; surface white; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 3500 K; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

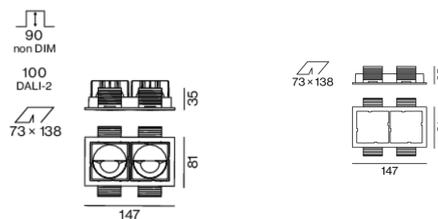

¹ RAL code

² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

