

# SASSO 60 square wallwasher/floor

trimless

048-2651017W 048-2697117 002-90743



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed  
white , RAL 9016 <sup>1</sup>  
Mounting set traffic white  
IP20  
1060 lm  
fixture 119 lm/W<sup>2</sup>

## LED

3000 K  
CRI ≥ 90  
L85 / 50000 h  
initial MacAdam ≤ 3 SDCM  
R<sub>g</sub>: 99 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 89  
MR 0.61  
MDER 0.55

## Optical

wallwasher floor  
PstLM ≤ 1.0 <sup>3</sup>  
SVM ≤ 0.4 <sup>3</sup>

## Electrical

non DIM  
220-240 V  
system 10.4 W  
fixture 8.9 W  
36 Vf  
250 mA  
PC2

## Physical

trimless  
length 72 mm  
width 72 mm  
height 48 mm  
0.23 kg

## Cutout

length 73 mm  
width 73 mm  
min. ceiling thickness 12.5 mm  
max. ceiling thickness 25 mm  
recessed depth 60 mm

<sup>1</sup> RAL code


<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

<sup>3</sup> Value of containing product at full load (undimmed)

## Installation instructions




## Lighting calculator

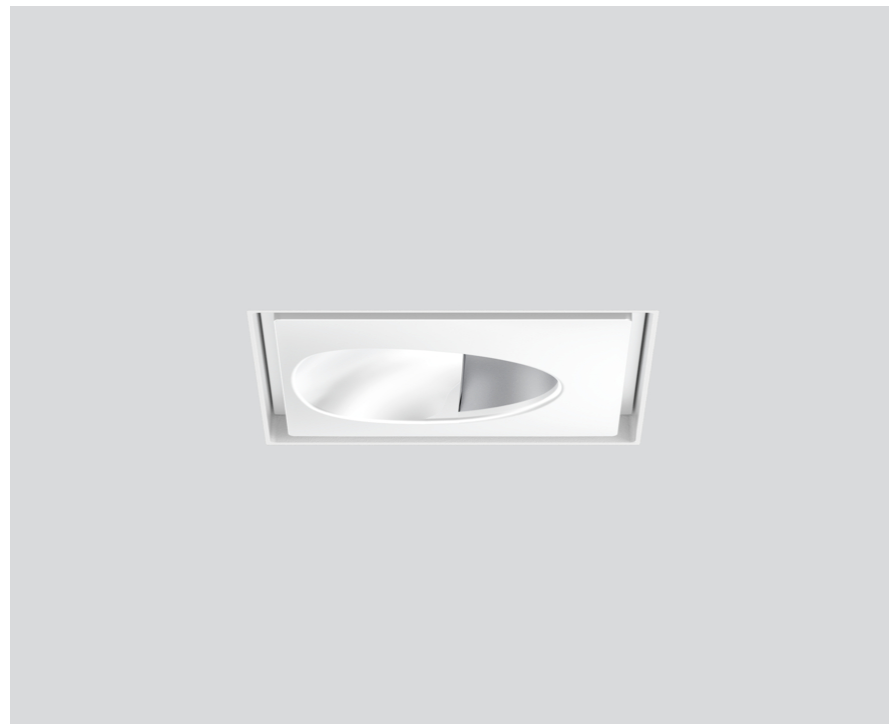


Recessed square spotlight in die-cast aluminium; 1 lamp; surface white; installation without tools in mounting set due to patented ball catch system; square installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

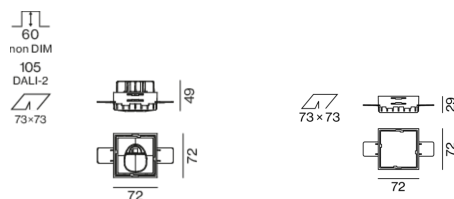

# SASSO 60 square wallwasher/floor

trimless

048-2651017W 048-2697117 002-90743



Project / Type

Notes

Count / Date

## Maintenance Factors

| Operating Time [h] | 10 000                       | 20 000 | 30 000            | 40 000                          | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF               | 0.982                        | 0.954  | 0.926             | 0.899                           | 0.873  |
| LSF                | 1                            | 1      | 1                 | 1                               | 1      |
| MF                 | LMF × RSMF × LLMF × LSF      |        | RSMF <sup>a</sup> | Room Surface Maintenance Factor |        |
| MF                 | Maintenance Factor           |        | LLMF              | Lamp Lumens Maintenance Factor  |        |
| LMF <sup>a</sup>   | Luminaire Maintenance Factor |        | LSF               | Lamp Survival Faktor            |        |

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 57                 |
| B13                            | 75                 |
| B16                            | 92                 |
| B20                            | 115                |
| C10                            | 57                 |
| C13                            | 75                 |
| C16                            | 92                 |
| C20                            | 115                |

## Components

### MOUNTING SET trimless

|   |               |            |                   |
|---|---------------|------------|-------------------|
| TYPE                                    | COLOUR        | L-W-H (MM) | ARTICLE NUMBER(S) |
| for plasterboard ceilings 12.5/15/25 mm | traffic white | 72-72-29   | 048-2697117       |

### POWER SUPPLY

|      |            |                   |
|------|------------|-------------------|
| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
| 10 W | 147-33-23  | 002-90743         |

## Mounting accessories

### THROUGH WIRING CONNECTION BOX

|  |            |                   |
|--|------------|-------------------|
| TYPE                                     | L-W-H (MM) | ARTICLE NUMBER(S) |
| non DIM cable ø 4 – 12 mm, Linect®-Ready | 105-58-30  | 005-2531110       |
| DALI cable ø 4 – 12 mm, Linect®-Ready    | 105-58-30  | 005-2551110       |

## Mounting accessories

### PRIMED CONCRETE MOUNTING HOUSING

|                 |             |                   |
|-----------------|-------------|-------------------|
| COLOUR          | L-W-H (MM)  | ARTICLE NUMBER(S) |
| white aluminium | 614-307-120 | 048-2695110       |

## Optional electrical accessories

### DIN RAIL POWER SUPPLY

|       |            |                   |
|-------|------------|-------------------|
| TYPE  | L-W-H (MM) | ARTICLE NUMBER(S) |
| 160 W | 72-90-63   | 005-6520210       |

### DIN RAIL LED DRIVER

|                                |            |                   |
|--------------------------------|------------|-------------------|
| TYPE                           | L-W-H (MM) | ARTICLE NUMBER(S) |
| DALI-2   200-1050 mA   2 x 42W | 36-88-59   | 005-6121030       |

