

SASSO 60 square wallwasher

trim 2 lamps

048-2651211A 048-2699317 002-90762



Project / Type

Notes

Count / Date



General

Ceiling , Recessed
black , RAL 9005 ¹
Mounting set traffic white
IP20
1180 lm
fixture 73 lm/W²

LED

3500 K
CRI ≥ 90
L90 / 50000 h
MR 0.82
MDER 0.74

Optical

wallwasher
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³

Electrical

DALI-2
220-240 V
system 19.0 W
fixture 8.1 W
36 Vf
250 mA
fixture 16.2 W
PC2
1 DALI Addr.

Physical

trim
length 147 mm
width 81 mm
height 48 mm
0.21 kg

Cutout


length 138 mm
width 73 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

¹ RAL code


² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

³ Value of containing product at full load (undimmed)

Light distribution



Product drawing

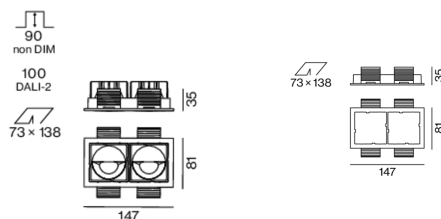

Installation instructions



Lighting calculator



[048-2651211A 048-2699317 002-90762] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

08.04.2025

1 / 1