

SASSO 60 square wallwasher/floor

trimless

048-2651011W 048-2697117 002-90762



Project / Type

Notes

Count / Date



General

Ceiling , Recessed
black , RAL 9005 ¹
Mounting set traffic white
IP20
1030 lm
fixture 117 lm/W²

LED

3000 K
CRI ≥ 90
L85 / 50000 h
initial MacAdam ≤ 3 SDCM
R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89
MR 0.61
MDER 0.55

Optical

wallwasher floor
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³

Electrical

DALI-2
220-240 V
system 10.4 W
fixture 8.9 W
36 Vf
250 mA
PC2
1 DALI Addr.

Physical


trimless
length 72 mm
width 72 mm
height 48 mm
0.28 kg

Cutout


length 73 mm
width 73 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 105 mm

Recessed square spotlight in die-cast aluminium; 1 lamp; surface black; installation without tools in mounting set due to patented ball catch system; square installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

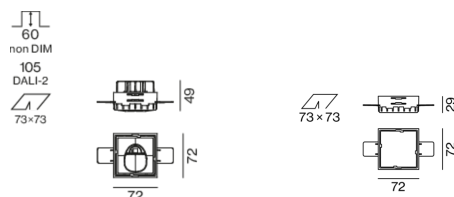

SASSO 60 square wallwasher/floor

trimless

048-2651011W 048-2697117 002-90762



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

