

SASSO 60 square wallwasher/floor

trimless

048-2651011W 048-2697117 002-90743



Project / Type

Notes

Count / Date



General

Ceiling , Recessed
black , RAL 9005 ¹
Mounting set traffic white
IP20
1030 lm
fixture 117 lm/W²

LED

3000 K
CRI ≥ 90
L85 / 50000 h
initial MacAdam ≤ 3 SDCM
R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89
MR 0.61
MDER 0.55

Optical

wallwasher floor
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³

Electrical

non DIM
220-240 V
system 10.4 W
fixture 8.9 W
36 Vf
250 mA
PC2

Physical

trimless
length 72 mm
width 72 mm
height 48 mm
0.23 kg

Cutout

length 73 mm
width 73 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 60 mm

¹ RAL code

² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

³ Value of containing product at full load (undimmed)


Installation instructions




Lighting calculator



Light distribution



Product drawing

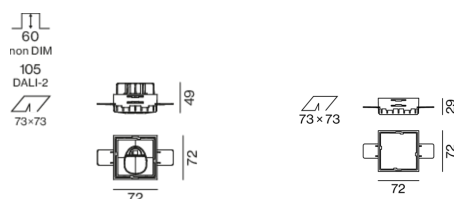

[048-2651011W 048-2697117 002-90743] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

05.04.2025

1 / 1