


SASSO 60 round wallwasher

trim 2 lamps

048-2641114A 048-269831G 002-90771



Project / Type	
Notes	
Count / Date	

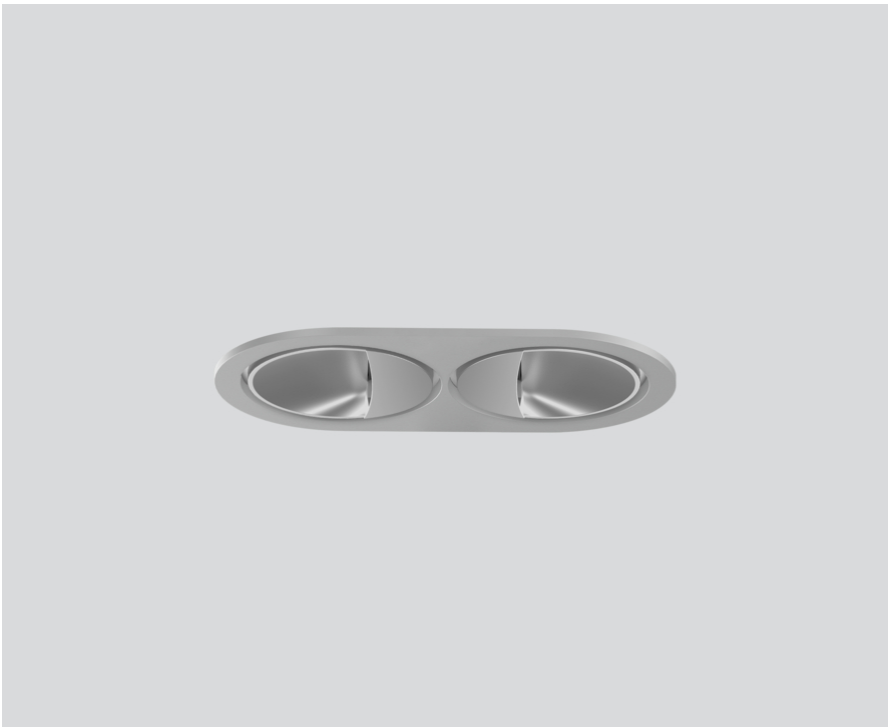

General

Ceiling , Recessed
rotation 360°
matt silver
Mounting set white aluminium
IP20
1300 lm
fixture 80 lm/W ¹

LED

4000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 102 , R _r : 93 , R ₍₁₋₁₅₎ : 92
MR 0.81
MDER 0.74

Optical

wallwasher
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

non DIM
220-240 V
system 19.0 W
fixture 8.1 W
36 Vf
250 mA
fixture 16.2 W
PC2

Physical


trim
length 147 mm
width 80 mm
height 48 mm
0.16 kg

Cutout


diameter 70 mm
length 70 mm
width 136 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 90 mm

Round recessed spotlight in die-cast aluminium; 2 lamps; surface matt silver; 360° rotatable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

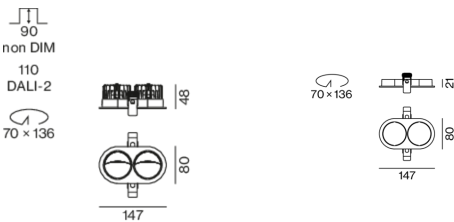

¹ incl. consideration of optical losses & internal control unit losses
² Value of containing product at full load (undimmed)



SASSO 60 round wallwasher

trim 2 lamps

048-2641114A 048-269831G 002-90771



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

