

SASSO 60 round adjustable

trim 2 lamps

048-2622219F 048-2698318 002-90790



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

tilt max 30°

rotation 360°

gold , RAL 260-M¹

Mounting set jet black

front IP40 , back IP20

1920 lm

fixture 90 lm/W²

LED

3500 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 99 , R_r: 90 , R_{t-15}: 89

MR 0.7

MDER 0.64

Optical

flood

beam angle 40°

UGR < 19 , ≥65° <1500 cd/m²

PstLM ≤ 1.0³

SVM ≤ 0.4³

Electrical

DALI-2

220-240 V

system 25.0 W

fixture 10.6 W

36 Vf

300 mA

fixture 21.3 W

PC2

1 DALI Addr.

Physical

trim

length 147 mm

width 80 mm

height 48 mm

0.34 kg

Cutout

diameter 70 mm

length 70 mm

width 136 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 110 mm

¹ RAL code


² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

³ Value of containing product at full load (undimmed)

Light distribution



Product drawing

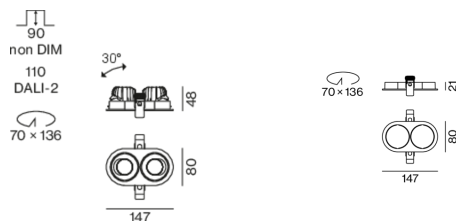

SASSO 60 round adjustable

trim 2 lamps

048-2622219F 048-2698318 002-90790



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator

