

# SASSO 60 square downlight

trim 2 lamps

048-2612919F 048-2699318 002-90790



Project / Type \_\_\_\_\_


Notes \_\_\_\_\_

Count / Date \_\_\_\_\_




Recessed square spotlight in die-cast aluminium; 2 lamps; surface gold; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 41° beam; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

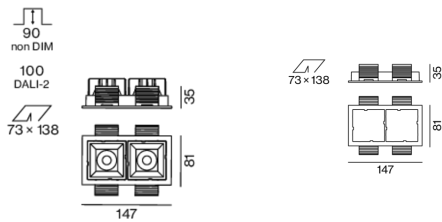

## General

Ceiling , Recessed  
gold , RAL 260-M <sup>1</sup>  
Mounting set jet black  
front IP44 , back IP20  
1900 lm  
fixture 89 lm/W<sup>2</sup>

## LED

2700 K  
CRI  $\geq 90$   
L80 / 50000 h  
initial MacAdam  $\leq 2$  SDCM  
R<sub>g</sub>: 97 , R<sub>f</sub>: 91 , R<sub>{1-15}</sub>: 87  
MR 0.52  
MDER 0.47

## Optical

flood  
beam angle 41°  
PstLM  $\leq 1.0$  <sup>3</sup>  
SVM  $\leq 0.4$  <sup>3</sup>

## Electrical

DALI-2  
220-240 V  
system 25.0 W  
fixture 10.6 W  
36 Vf  
300 mA  
fixture 21.3 W  
PC2  
1 DALI Addr.

## Physical

trim  
length 147 mm  
width 81 mm  
height 48 mm  
0.34 kg

## Cutout

length 138 mm  
width 73 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 100 mm

<sup>1</sup> RAL code  
<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.  
<sup>3</sup> Value of containing product at full load (undimmed)



# SASSO 60 square downlight

trim 2 lamps

048-2612919F 048-2699318 002-90790



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

