

SASSO 60 round downlight

trim 2 lamps

048-2602219F 048-269831G 002-90790




| |
|----------------|
| Project / Type |
| Notes |
| Count / Date |




Round recessed spotlight in die-cast aluminium; 2 lamps; surface gold; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 40° beam; UGR ≤ 19 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m²; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

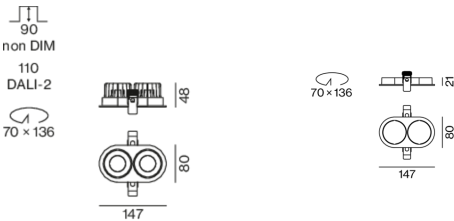

General

| |
|-------------------------------|
| Ceiling , Recessed |
| rotation 360° |
| gold , RAL 260-M ¹ |
| Mounting set white aluminium |
| front IP44 , back IP20 |
| 1950 lm |
| fixture 92 lm/W ² |

LED

| |
|---|
| 3500 K |
| CRI ≥ 90 |
| L80 / 50000 h |
| initial MacAdam ≤ 2 SDCM |
| R _g : 99 , R _r : 90 , R _{t(1-15)} : 89 |
| MR 0.7 |
| MDER 0.64 |

Optical

| |
|--|
| flood |
| beam angle 40° |
| UGR ≤ 19 , $\geq 65^\circ < 1500$ cd/m ² |
| PstLM ≤ 1.0 ³ |
| SVM ≤ 0.4 ³ |

Electrical

| |
|----------------|
| DALI-2 |
| 220-240 V |
| system 25.0 W |
| fixture 10.6 W |
| 36 Vf |
| 300 mA |
| fixture 21.3 W |
| PC2 |
| 1 DALI Addr. |

Physical

| |
|---------------|
| trim |
| length 147 mm |
| width 80 mm |
| height 48 mm |
| 0.34 kg |

Cutout

| |
|------------------------------|
| diameter 70 mm |
| length 70 mm |
| width 136 mm |
| min. ceiling thickness 2 mm |
| max. ceiling thickness 25 mm |
| recessed depth 110 mm |

¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)



SASSO 60 round downlight

trim 2 lamps

048-2602219F 048-269831G 002-90790



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator



SASSO 60 round downlight

trim 2 lamps

048-2602219F 048-269831G 002-90790



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|---|--------|--------|
| LLMF | 0.964 | 0.923 | 0.884 | 0.847 | 0.811 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a Room Surface Maintenance Factor | | |
| MF | Maintenance Factor | | LLMF Lamp Lumens Maintenance Factor | | |
| LMF ^a | Luminaire Maintenance Factor | | LSF Lamp Survival Faktor | | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 72 |
| B16 | 115 |
| C10 | 106 |
| C16 | 170 |

Components

MOUNTING SET with trim 2 lamps

| TYPE | COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|---------------------------|-----------------|------------|-------------------|
| for intermediate ceilings | white aluminium | 147-80-21 | 048-269831G |



POWER SUPPLY

| ARTICLE NUMBER(S) |
|-------------------|
| 002-90790 |

Mounting accessories

PRIMED CONCRETE MOUNTING HOUSING

| COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|-----------------|-------------|-------------------|
| white aluminium | 614-307-120 | 048-2695110 |



Optional electrical accessories

DIN RAIL LED DRIVER

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|--------------------------------|------------|-------------------|
| DALI-2 200-1050 mA 2 x 42W | 36-88-59 | 005-6121030 |



DIN RAIL POWER SUPPLY

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|-------|------------|-------------------|
| 160 W | 72-90-63 | 005-6520210 |



Optional electrical accessories

POWER SUPPLY PREWIRED

| TYPE | ARTICLE NUMBER(S) |
|-----------------------------|-------------------|
| with junktion box DALI-2 | 002-90790A |
| with junktion box DALI-2 | 002-90748A |
| with junktion box non DIM | 002-90771A |
| with junktion box non DIM | 002-90742A |



SASSO 60 round downlight

trim 2 lamps

048-2602219F 048-269831G 002-90790



Project / Type

Notes

Count / Date

Optional electrical accessories

POWER SUPPLY

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|----------------------------|------------|-------------------|
| with loop through function | 185-30-21 | 002-90770 |
| with loop through function | 185-30-21 | 002-90747 |

