

# SASSO 60 round downlight


trim 2 lamps

048-2602214F 048-269831G 002-90790




Round recessed spotlight in die-cast aluminium; 2 lamps; surface matt silver; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 40° beam; UGR  $\leq 19$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65°  $\leq 1500$  cd/m<sup>2</sup>; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

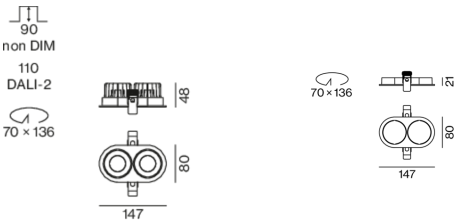

Project / Type	
Notes	
Count / Date	



## General

Ceiling , Recessed
rotation 360°
matt silver
Mounting set white aluminium
front IP44 , back IP20
2100 lm
fixture 99 lm/W <sup>1</sup>

## LED

3500 K
CRI $\geq 90$
L80 / 50000 h
initial MacAdam $\leq 2$ SDCM
R <sub>g</sub> : 99 , R <sub>r</sub> : 90 , R <sub>t(1-15)</sub> : 89
MR 0.7
MDER 0.64

## Optical

flood
beam angle 40°
UGR $\leq 19$ , $\geq 65^\circ$ $<1500$ cd/m <sup>2</sup>
PstLM $\leq 1.0$ <sup>2</sup>
SVM $\leq 0.4$ <sup>2</sup>

## Electrical

DALI-2
220-240 V
system 25.0 W
fixture 10.6 W
36 Vf
300 mA
fixture 21.3 W
PC2
1 DALI Addr.

## Physical

trim
length 147 mm
width 80 mm
height 48 mm
0.34 kg

## Cutout

diameter 70 mm
length 70 mm
width 136 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 110 mm

<sup>1</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.  
<sup>2</sup> Value of containing product at full load (undimmed)



# SASSO 60 round downlight

trim 2 lamps

048-2602214F 048-269831G 002-90790



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

