

SASSO 60 round wallwasher

trimless

048-2641919A 048-2696117 002-90748



Project / Type

Notes

Count / Date




General
Ceiling , Recessed
rotation 360°
gold , RAL 260-M ¹
Mounting set traffic white
IP20
544 lm
fixture 67 lm/W ²

LED
2700 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 101 , R _r : 91 , R ₍₁₋₁₅₎ : 89
MR 0.56
MDER 0.51


Optical
wallwasher
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³

Round recessed spotlight in die-cast aluminium; 1 lamp; surface gold; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

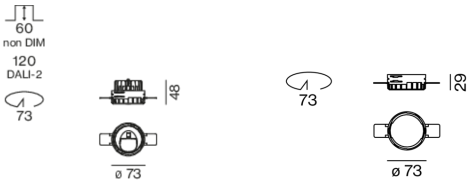

Electrical
DALI-2
220-240 V
system 9.5 W
fixture 8.1 W
36 Vf
250 mA
PC2
1 DALI Addr.

Physical
trimless
diameter 73 mm
height 48 mm
0.28 kg

Cutout
diameter 73 mm
recessed depth 120 mm

¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

