

# SASSO 60 round wallwasher/floor

trim 2 lamps

048-2641214W 048-2698317 002-90748



Project / Type

Notes

Count / Date



### General

Ceiling , Recessed

rotation 360°

matt silver

Mounting set traffic white

IP20

2080 lm

fixture 118 lm/W<sup>1</sup>

### LED

3500 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 96 , R<sub>r</sub>: 90 , R<sub>t(1-5)</sub>: 91

MR 0.74

MDER 0.67

### Optical


wallwasher floor

PstLM ≤ 1.0 <sup>2</sup>


SVM ≤ 0.4 <sup>2</sup>

Round recessed spotlight in die-cast aluminium; 2 lamps; surface matt silver; 360° rotatable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

### Light distribution



### Product drawing

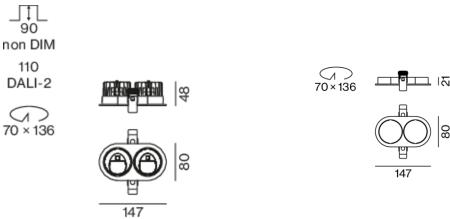

### Electrical

DALI-2

220-240 V

system 20.8 W

fixture 8.9 W

36 Vf

250 mA

fixture 17.7 W

PC2

1 DALI Addr.

### Physical

trim

length 147 mm

width 80 mm

height 48 mm

0.21 kg

### Cutout

diameter 70 mm

length 70 mm

width 136 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 110 mm

<sup>1</sup> incl. consideration of optical losses & internal control unit losses  
<sup>2</sup> Value of containing product at full load (undimmed)



# SASSO 60 round wallwasher/floor

trim 2 lamps

048-2641214W 048-2698317 002-90748



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

