

# SASSO 60 round adjustable

trim 2 lamps

048-2622219F 048-269831G 002-90771



Project / Type


Notes

Count / Date




Round recessed spotlight in die-cast aluminium; 2 lamps; surface gold; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 40° beam; UGR ≤ 19; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m²; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

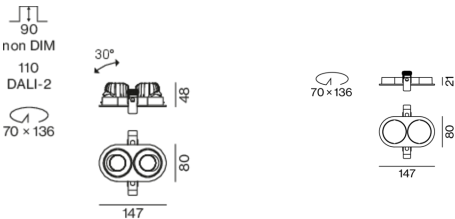

## General

Ceiling , Recessed  
tilt max 30°  
rotation 360°  
gold , RAL 260-M<sup>1</sup>  
Mounting set white aluminium  
front IP40 , back IP20  
1920 lm  
fixture 90 lm/W<sup>2</sup>

## LED

3500 K  
CRI ≥ 90  
L80 / 50000 h  
initial MacAdam ≤ 2 SDCM  
R<sub>g</sub>: 99 , R<sub>f</sub>: 90 , R<sub>t-15</sub>: 89  
MR 0.7  
MDER 0.64

## Optical

flood  
beam angle 40°  
UGR ≤ 19 , ≥65° <1500 cd/m²  
PstLM ≤ 1.0<sup>3</sup>  
SVM ≤ 0.4<sup>3</sup>

## Electrical

non DIM  
220-240 V  
system 25.0 W  
fixture 10.6 W  
36 Vf  
300 mA  
fixture 21.3 W  
PC2

## Physical

trim  
length 147 mm  
width 80 mm  
height 48 mm  
0.28 kg

## Cutout

diameter 70 mm  
length 70 mm  
width 136 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 90 mm

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses  
<sup>3</sup> Value of containing product at full load (undimmed)



# SASSO 60 round adjustable

trim 2 lamps

048-2622219F 048-269831G 002-90771



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator

