SASSO 60 round adjustable

trimless

048-2622014M 048-2696117 002-90771

Project / Type

Notes

Count / Date

Round recessed spotlight in die-cast aluminium; 1 lamp; surface matt silver; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 27° beam; UGR ≤ 16; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

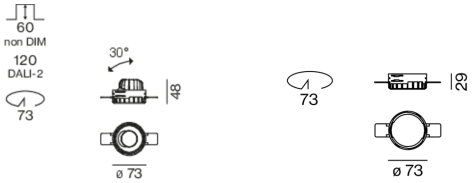

General

Ceiling , Recessed
tilt max 30°
rotation 360°
matt silver
Mounting set traffic white
front IP40 , back IP20
1080 lm
fixture 101 lm/W[1]

LED

3000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R_g: 99 , R_f: 90 , R_{f1-15}: 87
MR 0.6
MDER 0.54

Optical

medium
beam angle 27°
UGR ≤ 16
PstLM ≤ 1.0 [2]
SVM ≤ 0.4 [2]

Electrical

non DIM
220-240 V
system 12.5 W
fixture 10.6 W
36 Vf
300 mA
PC2

Physical

trimless
diameter 73 mm
height 48 mm
0.22 kg

Cutout

diameter 73 mm
recessed depth 60 mm

[1] incl. consideration of optical losses & internal control unit losses
[2] Value of containing product at full load (undimmed)

Installation instructions

Lighting calculator

['048-2622014M 048-2696117 002-90771'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com