

# SASSO 60 round downlight

trimless

048-2602911W 048-2696117 002-90771



Project / Type
Notes
Count / Date



<b>General</b>
Ceiling , Recessed
rotation 360°
black , RAL 9005 <sup>1</sup>
Mounting set traffic white
front IP44 , back IP20
932 lm
fixture 88 lm/W <sup>2</sup>


<b>LED</b>
2700 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R <sub>g</sub> : 97 , R <sub>r</sub> : 91 , R <sub>(1-15)</sub> : 87
MR 0.52
MDER 0.47

<b>Optical</b>
wide flood
beam angle 56°
PstLM ≤ 1.0 <sup>3</sup>
SVM ≤ 0.4 <sup>3</sup>


Round recessed spotlight in die-cast aluminium; 1 lamp; surface black; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 56° beam; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

<b>Electrical</b>
non DIM
220-240 V
system 12.5 W
fixture 10.6 W
36 Vf
300 mA
PC2

## Light distribution



## Product drawing

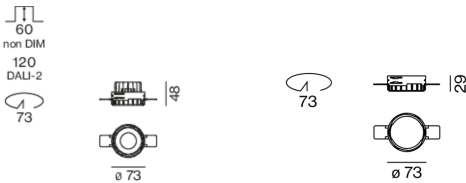

<b>Physical</b>
trimless
diameter 73 mm
height 48 mm
0.22 kg

<b>Cutout</b>
diameter 73 mm
recessed depth 60 mm

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses  
<sup>3</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator

