

# SASSO 60 round downlight trim soft acoustic ceiling


048-2602119W 048-2696398 002-90771



Project / Type

Notes

Count / Date

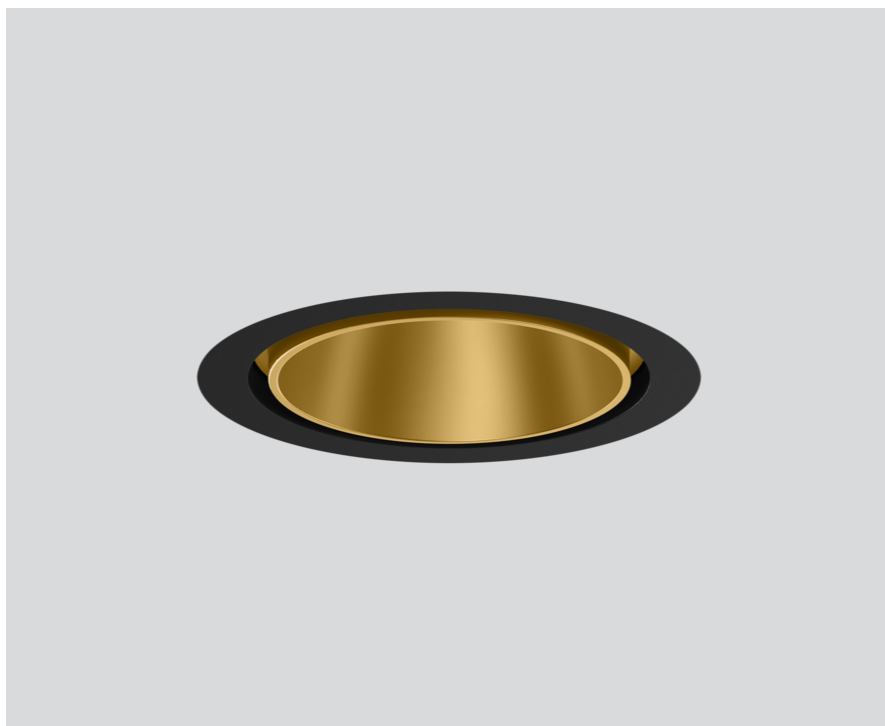

## General

Ceiling , Recessed  
rotation 360°  
gold , RAL 260-M<sup>1</sup>  
Mounting set traffic black for acoustic ceilings  
front IP44 , back IP20  
1060 lm  
fixture 100 lm/W<sup>2</sup>

## LED

4000 K  
CRI ≥ 90  
L80 / 50000 h  
initial MacAdam ≤ 2 SDCM  
R<sub>g</sub>: 98 , R<sub>r</sub>: 90 , R<sub>t(1-5)</sub>: 88  
MR 0.8  
MDER 0.72

## Optical

wide flood  
beam angle 56°  
PstLM ≤ 1.0<sup>3</sup>  
SVM ≤ 0.4<sup>3</sup>

## Electrical

non DIM  
220-240 V  
system 12.5 W  
fixture 10.6 W  
36 Vf  
300 mA  
PC2

## Physical


with trim for acoustic ceiling  
diameter 80 mm  
height 48 mm  
0.21 kg

## Cutout


diameter 74 mm  
min. ceiling thickness 25 mm  
max. ceiling thickness 40 mm  
recessed depth 60 mm

Round recessed spotlight in die-cast aluminium; 1 lamp; surface gold; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim traffic black for acoustic ceilings; for installation in soft acoustic ceilings; suitable for ceiling thickness of 25-40 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 56° beam; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



<sup>1</sup> RAL code

<sup>2</sup> incl. consideration of optical losses & internal control unit losses

<sup>3</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator



[048-2602119W 048-2696398 002-90771] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

22.04.2025

1 / 1