

SASSO 60 round downlight

trim

048-2602114W 048-2696318 002-90771



| |
|----------------|
| Project / Type |
| Notes |
| Count / Date |




| |
|-------------------------------|
| General |
| Ceiling , Recessed |
| rotation 360° |
| matt silver |
| Mounting set jet black |
| front IP44 , back IP20 |
| 1130 lm |
| fixture 106 lm/W ¹ |

| |
|---|
| LED |
| 4000 K |
| CRI ≥ 90 |
| L80 / 50000 h |
| initial MacAdam ≤ 2 SDCM |
| R _g : 98 , R _r : 90 , R _{t1-15} : 88 |
| MR 0.8 |
| MDER 0.72 |


| |
|--------------------------|
| Optical |
| wide flood |
| beam angle 56° |
| PstLM ≤ 1.0 ² |
| SVM ≤ 0.4 ² |

Round recessed spotlight in die-cast aluminium; 1 lamp; surface matt silver; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 56° beam; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

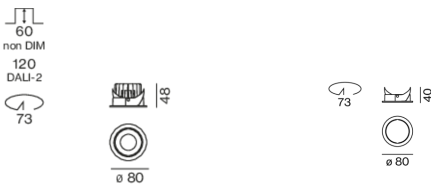

| |
|-------------------|
| Electrical |
| non DIM |
| 220-240 V |
| system 12.5 W |
| fixture 10.6 W |
| 36 Vf |
| 300 mA |
| PC2 |

| |
|-----------------|
| Physical |
| trim |
| diameter 80 mm |
| height 48 mm |
| 0.21 kg |

| |
|------------------------------|
| Cutout |
| diameter 73 mm |
| min. ceiling thickness 2 mm |
| max. ceiling thickness 25 mm |
| recessed depth 60 mm |

¹ incl. consideration of optical losses & internal control unit losses
² Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

