



## SONIC

suspended

**EN** Conical light housing in die-cast aluminium; powder coated; pendant fitting with cable suspension; with integrated tool-less suspension height adjustment; incl. transparent feed or with height adjustable rod suspension (chrome), feed in rod; direct/indirect light distribution; indirect component – special PCBs for increased luminous flux (max. ceiling illumination); completely homogeneous illumination; energy-eff. LEDs – very good colour rendering; canopy for through wiring; acoustic elements made of high-quality, self-supporting, recycled PET felt (high acoustic performance by doubling the material) or as an acoustically effective lampshade (large selection of colours) with sound absorbing properties


**ES** Cuerpo luminoso cónico de inyección en aluminio; recubierto de polvo; suspendido con cable; regulación de la altura sin necesitar herramientas; incluido cable de alimentación transparente o cable cromado para suspensión ajustable; característica de emisión directa/indirecta; comp. de luz indir. – Pletinas prop. para mayor flujo luminoso (máx. alumbr. del techo); iluminación homogénea; LED energét. efíc. – excelente reprod. crom.; baldaquino para cableado pasante; elementos acústicos de fieltro PET reciclado y autoportante de calidad superior (alto rendimiento acústico por duplicación de material) o como pantalla de luminaria con efecto acústico (gran selección de colores) y propiedades de absorción del sonido

### Quickinfo

3000 K, 4000 K  
CRI ≥ 80, 3 SDCM  
up to 152lm/W  
L90 @ 50 000h  
DALI-2  
brightness & presence sensor  
microprismatic (UGR ≤ 19)

acoustic elements  
♻️ from recycled material  
🔥 available as B-s1, d0

### Types



### Luminaire colours




### Acoustic colours



### Light distribution



DiiA® standards  
251, 252, 253



microprismatic  
(UGR ≤ 19)



sensor version  
available



acoustic  
absorber



direct/indirect  
illumination

### Order options

<b>SUSPENSION</b>	
cable 1500 mm	2
rod 1000 mm	4

<b>COLOUR TEMPERATURE</b>	
3000K	5
4000K	6

<b>CONTROL</b>	
DALI-2	3
ESSENTIAL sensor (brightness & presence)	7

<b>LUMINAIRE COLOUR</b>	
○ pure white RAL 9010	7
● black grey RAL 7021	6
special colours* p.992	X



\*canopy always in white

<b>ACOUSTIC COLOUR</b>	
○ white	W
● marble grey	D
● felt grey	G
● black	L
special colours p.992	X

<b>LIGHT OPTIC COVER</b>	
microprismatic (UGR ≤ 19)	

### Options on request

<b>COLOUR RENDERING INDEX</b>	
CRI ≥ 90	



\*rod version


### SONIC suspended



#### DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
69W	3000K	↓ 5000 / ↑ 4940lm	0 5 9 - 7 8 2 1   P
	4000K	↓ 5290 / ↑ 5230lm	

### Technical data



**SONIC** suspended, 69W, 4000K direct/indirect with absorber

<b>ROOM VALUES</b>	
Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7   0.5   0.2
Maintenance factor	0.8
Mounting height	2.25 m

<b>CALCULATION SURFACE</b>	
Surface dimensions	Floor
Surface height	0.5 m

<b>GLARE EVALUATION</b>	
Table Classification	X=4H   Y=8H   S=0.25H
UGR transversal	≤ 19
UGR axial	≤ 19




### LIGHT OPTIC COVER

microprismatic (UGR ≤ 19)

### Options on request

#### COLOUR RENDERING INDEX

CRI ≥ 90




### Acoustic elements

#### SONIC ABSORBER ring

COLOUR	Ø-H (mm)	ORDER CODE
white	1050-50	0 5 9 - 7 7 1 1 2 1 W
white	1280-50	0 5 9 - 7 7 1 1 1 1 W
marble grey	1050-50	0 5 9 - 7 7 1 1 2 1 D
marble grey	1280-50	0 5 9 - 7 7 1 1 1 1 D
black	1050-50	0 5 9 - 7 7 1 1 2 1 L
black	1280-50	0 5 9 - 7 7 1 1 1 1 L

only in combination with SONIC suspended or SONIC free standing




#### SONIC ABSORBER DISK suspended


COLOUR	Ø-H (mm)	ORDER CODE
white	1050-50	0 5 9 - 7 7 2 2 2 1 W
white	1280-50	0 5 9 - 7 7 2 2 1 1 W
marble grey	1050-50	0 5 9 - 7 7 2 2 2 1 D
marble grey	1280-50	0 5 9 - 7 7 2 2 1 1 D
black	1050-50	0 5 9 - 7 7 2 2 2 1 L
black	1280-50	0 5 9 - 7 7 2 2 1 1 L

cable suspension 1500 mm

### Light distribution



microprismatic  
direct/indirect




### SONIC SOUNDCAP

TYPE	Ø-H (mm)	ORDER CODE
soundcap	527-300	0 5 9 - 7 7 3 1 1 1

only in combination with SONIC suspended or SONIC free standing;  
bracket colour white; other bracket colours on request;

**LUMINOUS FLUX** value calculated for  
CRI ≥ 80, colour white, cover microprismatic

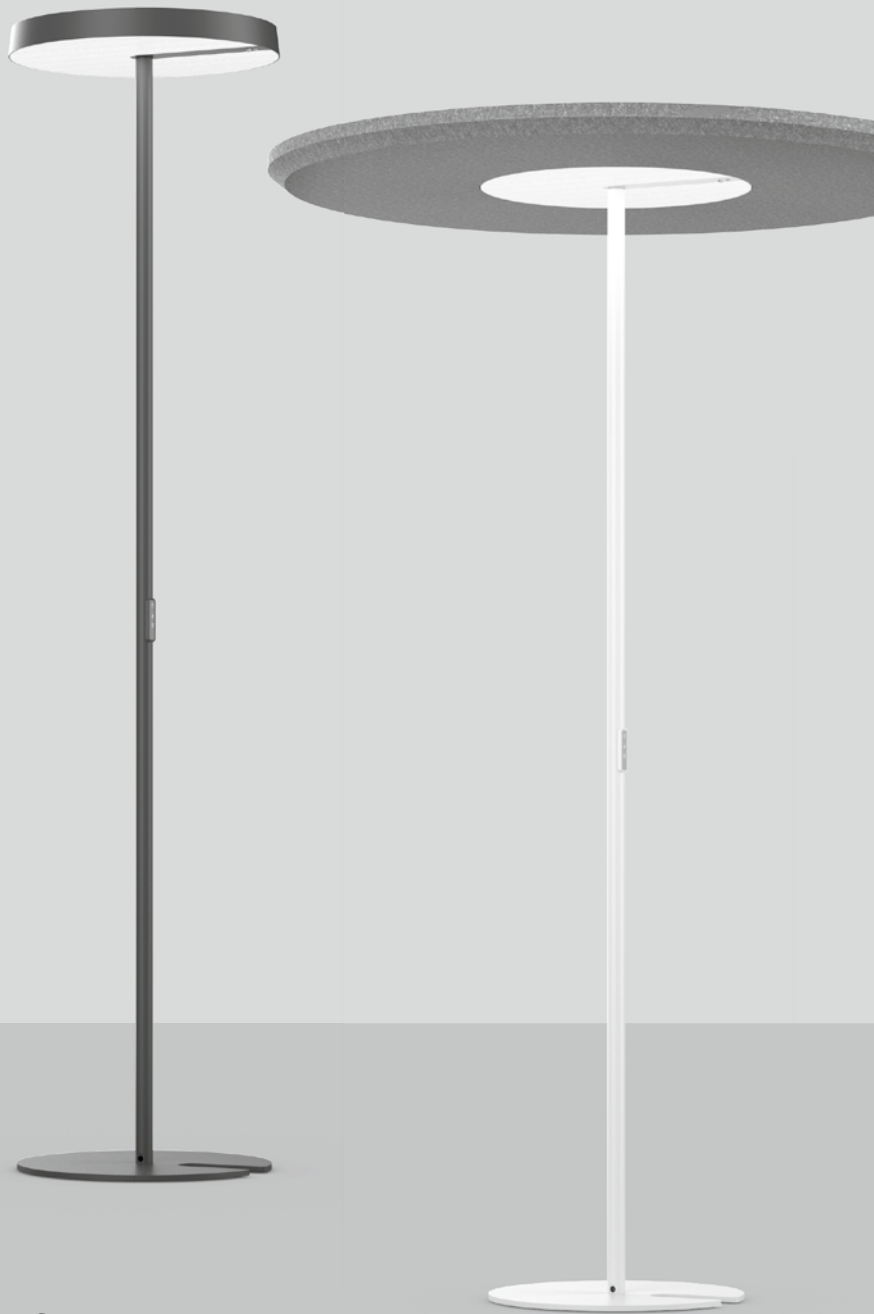

# SONIC

free standing

**EN** Free standing luminaire with conical luminaire head in die-cast aluminium; powder coated; round aluminium downpipe arranged centralised or decentralised; round pedestal with recess for table base; direct/indirect light distribution; indirect component – special PCBs for increased luminous flux (max. ceiling illumination); optional: indirect component with special, inclined PCBs for asymmetric radiation characteristic; completely homogeneous illumination; energy-eff. LEDs – very good colour rendering; incl. connection cable (3m) with safety plug; acoustic elements made of high-quality, self-supporting, recycled PET felt (high acoustic performance by doubling the material) or as an acoustically effective lampshade (large selection of colours) with sound absorbing properties


**ES** Lámpara de pie con cabezal cónico de inyección en aluminio; recubierto de polvo; tubo vertical de aluminio con ubicación opcionalmente centralizado o descentralizado; soporte redondo con sistema de fijación para pata de mesa; característica de emisión directa/indirecta; comp. de luz indir. – Pletinas prop. para mayor flujo luminoso (máx. alubr. del techo); opcional: proporción indirecta con pletinas propias oblicuas para característica de emisión asimétrica; iluminación homogénea; LED energético. ef. – excelente repro. crom.; incluye 3 metros de cable de conexión; elementos acústicos de fieltro PET reciclado y autoportante de calidad superior (alto rendimiento acústico por duplicación de material) o como pantalla de luminaria con efecto acústico (gran selección de colores) y propiedades de absorción del sonido

## Quickinfo

3000 K, 4000 K  
 CRI ≥ 80, 3 SDCM  
 UGR ≤ 19 / 65° ≤ 3000 cd/m<sup>2</sup>  
 up to 152 lm/W  
 L90 @ 50 000h  
 non DIM, touch DIM on pole  
 brightness & presence sensor  
 microprismatic (UGR ≤ 19)

acoustic elements  
 ♻️ from recycled material  
 🔥 available as B-s1, d0

## Types

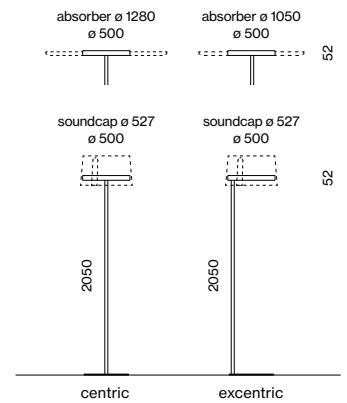

## Luminaire colours



## Acoustic colours



## Light distribution



DiiA® standards  
 251, 252, 253



microprismatic  
 (UGR ≤ 19)



sensor version  
 available



direct/indirect  
 illumination

## Order options

<b>COLOUR TEMPERATURE</b>	☐☐
3000K	5
4000K	6

<b>CONTROL</b>	⬆️⬆️
non DIM switch	1
touch DIM on pole	5
ESSENTIAL sensor (brightness & presence)	7

<b>LUMINAIRE COLOUR</b>	☑️
○ pure white RAL 9010	7
● black grey RAL 7021	6
🌈 special colours ➡ p.992	X

<b>ACOUSTIC COLOUR</b>	■
○ white	W
● marble grey	D
● felt grey	G
● black	L
🌈 special colours ➡ p.992	X


<b>LIGHT OPTIC COVER</b>	
microprismatic (UGR ≤ 19)	

## Options on request


<b>COLOUR RENDERING INDEX</b>	
CRI ≥ 90	

<b>CONTROL</b>	
cluster network DIM	
dynamic daylight control (BPI)	
Zigbee 3.0	

## Light distributions





microprismatic  
direct/indirect




microprismatic  
direct/indirect asym. power

**LUMINOUS FLUX** value calculated for  
CRI ≥ 80, colour white, cover microprismatic



## SONIC centric pole free standing




### DIRECT/INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
69W	3000K	↓ 5000/↑ 4940lm	059-7921 ☐☐☐☐☐
	4000K	↓ 5290/↑ 5230lm	

### DIRECT/INDIRECT ASYMMETRIC POWER

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
105W	3000K	↓ 4260/↑ 9840lm	059-7941 ☐☐☐☐☐
	4000K	↓ 4510/↑ 10500lm	

## SONIC excentric pole free standing




### DIRECT/INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
69W	3000K	↓ 5000/↑ 4940lm	059-7922 ☐☐☐☐☐
	4000K	↓ 5290/↑ 5230lm	

### DIRECT/INDIRECT ASYMMETRIC POWER

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
105W	3000K	↓ 4260/↑ 9840lm	059-7942 ☐☐☐☐☐
	4000K	↓ 4510/↑ 10500lm	

## Technical data



**SONIC excentric pole free standing**  
69W, 4000K, direct/indirect

### ROOM VALUES

Room dimensions	5.4 × 4 × 2.8m
Reflection factor	0.7   0.5   0.2
Maintenance factor	0.8

### CALCULATION SURFACE

Surface dimensions	1.6 × 0.8
Surface height	0.75
Average illuminance (E <sub>m</sub> )	> 500 lx
Uniformity (U <sub>0</sub> )	> 0.6

### GLARE EVALUATION

Table Classification X=4H   Y=8H   S=0.25H	
UGR transversal	≤ 19
UGR axial	≤ 19



## Acoustic elements

### SONIC ABSORBER ring

COLOUR	Ø-H (mm)	ORDER CODE
white	1050-50	059-771121W
white	1280-50	059-771111W
marble grey	1050-50	059-771121D
marble grey	1280-50	059-771111D
black	1050-50	059-771121L
black	1280-50	059-771111L

only in combination with SONIC suspended or SONIC free standing

### SONIC SOUNDCAP

TYPE	Ø-H (mm)	ORDER CODE
soundcap	527-300	059-773111 ■

only in combination with SONIC suspended or SONIC free standing;  
bracket colour white; other bracket colours on request

