



General

Techo / Pared, Superficie¹-Semi-empotrado²

negro, RAL9005³

negro intenso

parte delantera IP20¹-IP40², parte trasera IP20

2590 lm

2130 lm/m

LED

4000 K

IRC \geq 80

L90 / 50000 h

MacAdam inicial \leq 3 SDCM

MR 0.72

MDER 0.66

Óptico

High Performance Opal

opal (lambertsch)

PstLM \leq 1.0⁴

SVM \leq 0.4⁴

Eléctrico

DALI-2

220-240 V

sistema 19.1 W

CP1

sistema 136 lm/W⁵

1 DALI Addr.

16 W/m

Físico

longitud 1221 mm

ancho 89 mm

altura 28 mm

2.7 kg

Orificio

longitud 1234 mm

ancho 70 mm

espesor mín. del techo 12.5 mm

profundidad empotrada 13 mm

¹ superficie ² semiempotrado ³ Código RAL


⁴ Valor del producto continente a plena carga (no atenuado)

⁵ incl. optical losses and the efficiency of the operating device (converter)

Instrucciones de montaje



Distribución luminosa

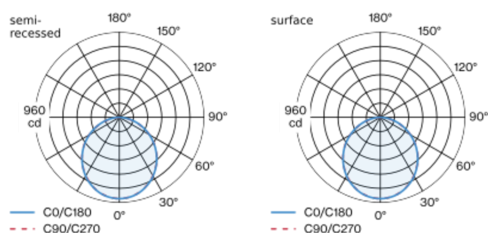

Diseño del producto

