



TULA

suspended

EN Decorative suspended luminaire in aluminium; surface polished chrome or powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; good glare reduction due to recessed light point plane; incl. high quality lens system; COB (Chip on Board) technology or high power LEDs for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy, either recessed or surface mounted version; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory

ES Luminaria suspendida decorativa de aluminio; superficie cromada pulida o con recubrim. de pintura en polvo; suspensión pendular con cable de alim. (negro o blanco); acortable; buena prevenc. del deslumbram. con plano de punto de luz retranq.; óptica de alta calidad; proyec. precisa con distintos ángulos de apertura; tecnología COB (Chip on Board) para máxima eficiencia; sin sombras múltiples; LEDs eficientes de muy buena reproducción cromática; remate de techo para cableado; convert. integrado en remate, opcional. como variante empotrada o de superficie; anillos de montaje en techo opcionales para posicionam. múltiple de la luminaria en la sala

Quickinfo

2700 K, 3000 K
CRI ≥ 90, 3 SDCM
up to 95 lm/W
L90 @ 50 000 h
non DIM, DALI-2, Casambi


Types



Colours



Light distributions

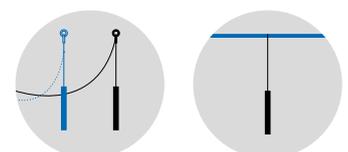

free positioning by
ring and hook

track version
available

Order options

HOUSING HEIGHT

300 mm	5
500 mm	7

SUSPENSION

cable 1500 mm	
---------------	--

COLOUR TEMPERATURE

2700 K	4
3000 K	5

MATERIAL COLOUR

chrome	4
traffic white RAL 9016	7
jet black RAL 9005	8
special colours*	X

*cable always in white

BEAM ANGLE

medium 25°	M
flood 44°	F



ACCESSORY COLOUR

traffic white RAL 9016	7
jet black RAL 9005	8

Options on request

COLOUR TEMPERATURE

4000 K	
--------	--

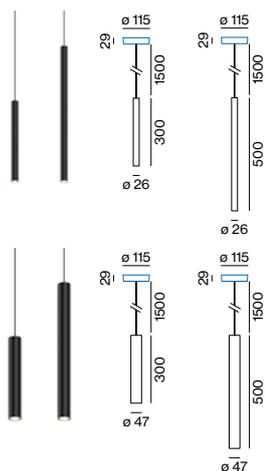

TULA nano suspended



INSET POWER	LUMINOUS FLUX	ORDER CODE
9W 18 Vf 500mA	732lm	049-5 L 10 :: 1

TULA micro suspended



INSET POWER	LUMINOUS FLUX	ORDER CODE
8.4W 18 Vf 500mA	798lm	049-5 L 15 :: 1

Mounting accessories

CANOPY CEILING 220-240V AC, 50-60Hz, PC II

TYPE	EFFICIENCY	Ø-H (mm)	ORDER CODE
500 mA non DIM	η 79 %	115-29	005-260211
500 mA DALI-2	η 81 %	115-29	005-260213
500 mA Casambi	η 85 %	115-29	005-260219

MOUNTING SET RECESSED WITH TRIM

for installation in ceilings from 2-25mm

TYPE	Ø-H (mm)	ORDER CODE
mounting set with trim	77-49	005-352101

MOUNTING SET RECESSED TRIMLESS

for installation in plasterboard ceilings 9-25mm

TYPE	Ø-H (mm)	ORDER CODE
mounting set trimless	75-48	005-3511017

SPECIAL MOUNTING TOOL

TYPE	Ø-H (mm)	ORDER CODE
special mounting tool	100-9	063-8912110

necessary to install mounting set trimless

RING

TYPE	Ø-H (mm)	ORDER CODE
ceiling mounted	50-88	050-051021

HOOK

TYPE	L-W-H (mm)	ORDER CODE
ceiling mounted	18-13-58	050-051031

Electrical accessories

POWER SUPPLY 220-240V AC, 50-60Hz, PC II

TYPE	EFFICIENCY	L-W-H (mm)	ORDER CODE
500 mA non DIM	η 80 %	65-39-20	002-90732
500 mA DALI-2	η 82 %	147-33-23	002-90733

DIN RAIL COMPONENTS

TYPE	W-H-D (mm)	ORDER CODE
POWER SUPPLY 220-240V AC 160W 48V DC constant voltage	72-90-63	005-6520210
LED DRIVER DALI-2 DT6 1-2 addr. 200-1050 mA settable const. current 2x42W 48V DC U _{OUT} 10-40V	36-88-59	005-6121030

Optical accessories

HONEYCOMB LOUVER AND LENSES

TYPE	Ø-H (mm)	ORDER CODE
TULA micro honeycomb louver	42-3	007-1965188
TULA micro oval lens	42-3	007-1965880
TULA micro soft lens	42-3	007-1965980
TULA micro wallwasher lens	42-3	007-1965780

INSET POWER is the current

consumption excluding any ballast

LUMINOUS FLUX value calculated for

3000K, CRI ≥ 90, colour white, lens flood

2700K -5%