




Proyecto / Tipo \_\_\_\_\_

Notas \_\_\_\_\_

Cantidad / Fecha \_\_\_\_\_

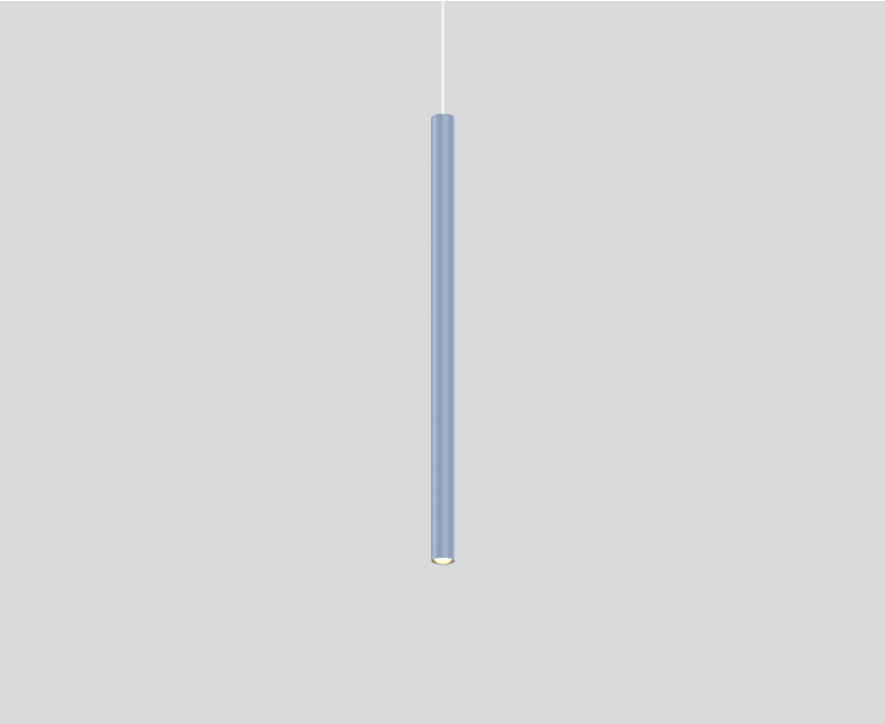

**General**

Techo , Suspendido \_\_\_\_\_

colores especiales \_\_\_\_\_

Baldaqin blanco tráfico \_\_\_\_\_

IP20 \_\_\_\_\_

699 lm \_\_\_\_\_

**LED**

2700 K \_\_\_\_\_

IRC  $\geq 90$  \_\_\_\_\_

MacAdam inicial  $\leq 3$  SDCM \_\_\_\_\_

R<sub>g</sub>: 99 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 89 \_\_\_\_\_

MR 0.53 \_\_\_\_\_

MDER 0.48 \_\_\_\_\_

**Óptico**

medium \_\_\_\_\_

ángulo de haz 25° \_\_\_\_\_

**Eléctrico**

non atenuable \_\_\_\_\_

sistema 12.0 W \_\_\_\_\_

inserto 9.0 W \_\_\_\_\_

18 Vf \_\_\_\_\_

500 mA \_\_\_\_\_

CP2 220-240V \_\_\_\_\_

sistema 58 lm/W<sup>1</sup> \_\_\_\_\_

inserto 78 lm/W<sup>2</sup> \_\_\_\_\_


**Físico**

diámetro 26 mm \_\_\_\_\_

altura 500 mm \_\_\_\_\_

0.42 kg \_\_\_\_\_

Distribución luminosa



medium 25°

| h (m) | EO° (lx) | ø (m) |
|-------|----------|-------|
| 1     | 2620     | 0.44  |
| 2     | 660      | 0.89  |
| 3     | 290      | 1.33  |
| 4     | 160      | 1.77  |
| 5     | 100      | 2.22  |

Diseño del producto



<sup>1</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>2</sup> incl. optical losses

Instrucciones de montaje



Calculadora de iluminación

