

SASSO 100 square downlight

trim 2 lamps

048-2710614F 048-2799318 002-90774



Proyecto / Tipo

Notas

Cantidad / Fecha



↑ IP20
↓ IP44

220-240V

X-PERT

UGR
≤ 16

cd/m²
≤ 3000

CRI
≥ 90

X-PERT

General

Techo , Empotrado

plata mate

Set de montaje negro intenso

parte delantera IP44 , parte trasera IP20

4700 lm

LED

4000 K

IRC ≥ 90

L80 / 50000 h

MacAdam inicial ≤ 2 SDCM

R_g: 97 , R_f: 90 , R_{t(1-15)}: 89

MR 0.81

MDER 0.74

Óptico

flood

beam angle 45°

UGR < 16 , ≥ 65° < 3000 cd/m²

PstLM ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Eléctrico

non atenuable

58 W

inserto 24.8 W

36 Vf

700 mA

total de insertos 50 W

CP2 220-240V

81 lm/W

inserto 95 lm/W

Físico

borde

length 218 mm

width 118 mm

altura 75 mm

0.55 kg

Orificio

length 210 mm

width 112 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

¹ Valor del producto continente a plena carga (no atenuado)

Distribución luminosa



Diseño del producto

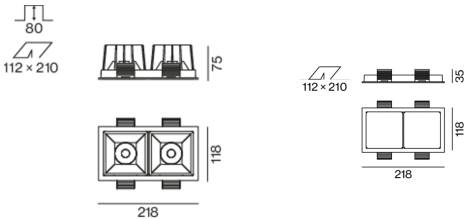

Instrucciones de montaje



Calculadora de iluminación

