

SASSO 100 square downlight

trimless

048-2710617S 048-2797117 002-90774



Proyecto / Tipo
Notas
Cantidad / Fecha



↑ IP20 ↓ IP44	220-240V	X-PERT	UGR ≤ 16	CRI ≥ 90	X-PERT
------------------	----------	--------	-------------	-------------	--------

General

Techo , Empotrado
blanco , RAL9016 ¹
Set de montaje blanco tráfico
parte delantera IP44 , parte trasera IP20
2140 lm

LED

4000 K
IRC ≥ 90
L80 / 50000 h
MacAdam inicial ≤ 2 SDCM
R _g : 97 , R _f : 90 , R _{t(1-15)} : 89
MR 0.81
MDER 0.74

Óptico

spot
beam angle 19°
UGR < 16
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Eléctrico

non attenuable
29.2 W
inserto 24.8 W
36 V _f
700 mA
CP2 220-240V
73 lm/W
inserto 86 lm/W

Físico


sin borde
length 105 mm
width 105 mm
altura 75 mm
0.47 kg

Orificio


length 106 mm
width 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ Código RAL
² Valor del producto continente a plena carga (no atenuado)

Distribución luminosa



Diseño del producto

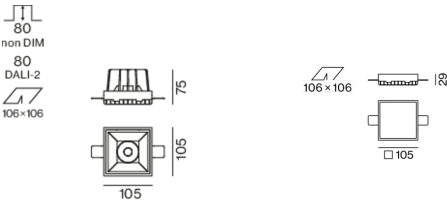

Instrucciones de montaje



Calculadora de iluminación

