

# SASSO 100 square downlight

trim 2 lamps

048-2710614M 048-2799317 002-90774



Proyecto / Tipo
Notas
Cantidad / Fecha



↑ IP20 ↓ IP44	220-240V	X-PERT	UGR ≤ 16	cd/m² ≤ 3000	CRI ≥ 90	X-PERT
------------------	----------	--------	-------------	-----------------	-------------	--------

## General

Techo , Empotrado
plata mate
Set de montaje blanco tráfico
parte delantera IP44 , parte trasera IP20
4220 lm

## LED

4000 K
IRC ≥ 90
L80 / 50000 h
MacAdam inicial ≤ 2 SDCM
R <sub>g</sub> : 97 , R <sub>f</sub> : 90 , R <sub>(1-15)</sub> : 89
MR 0.81
MDER 0.74

## Óptico

medium
beam angle 33°x34°
UGR < 16 , ≥ 65° < 3000 cd/m²
PstLM ≤ 1.0 <sup>1</sup>
SVM ≤ 0.4 <sup>1</sup>

## Eléctrico

non atenuable
58 W
inserto 24.8 W
36 Vf
700 mA
total de insertos 50 W
CP2 220-240V
73 lm/W
inserto 85 lm/W

## Físico


borde
length 218 mm
width 118 mm
altura 75 mm
0.56 kg

## Orificio


length 210 mm
width 112 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

<sup>1</sup> Valor del producto continente a plena carga (no atenuado)

## Distribución luminosa



## Diseño del producto

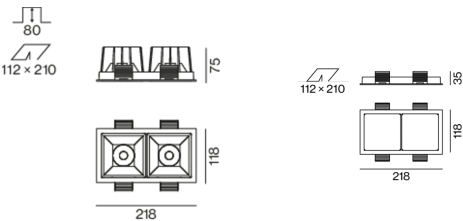

## Instrucciones de montaje



## Calculadora de iluminación

