

SASSO 100 square downlight

trim

048-2710414M 048-279731G 002-90777



Proyecto / Tipo
Notas
Cantidad / Fecha



↑ IP20 ↓ IP44	220-240V	X-PERT	UGR ≤ 16	cd/m² ≤ 1500	CRI ≥ 90	X-PERT
------------------	----------	--------	-------------	-----------------	-------------	--------

General

Techo , Empotrado
plata mate
Set de montaje aluminio blanco
parte delantera IP44 , parte trasera IP20
1430 lm

LED

2700 K
IRC ≥ 90
L80 / 50000 h
MacAdam inicial ≤ 2 SDCM
R _g : 99 , R _r : 91 , R ₍₁₋₁₅₎ : 89
MR 0.53
MDER 0.48

Óptico

medium
beam angle 33°x34°
UGR < 16 , ≥ 65° < 1500 cd/m²
PstLM ≤ 1.0 ¹
SVM ≤ 0.4 ¹

Eléctrico

non atenuable
20.2 W
inserto 17.2 W
36 V _f
500 mA
CP2 220-240V
71 lm/W
inserto 83 lm/W

Físico


borde
length 118 mm
width 118 mm
altura 75 mm
0.51 kg

Orificio


length 112 mm
width 112 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ Valor del producto continente a plena carga (no atenuado)

Distribución luminosa



Diseño del producto

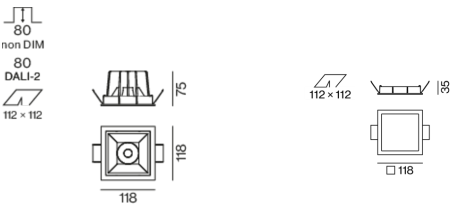

Instrucciones de montaje



Calculadora de iluminación

