

LITO 60 direct / indirect

suspended


046-522863GZ



Proyecto / Tipo

Notas

Cantidad / Fecha

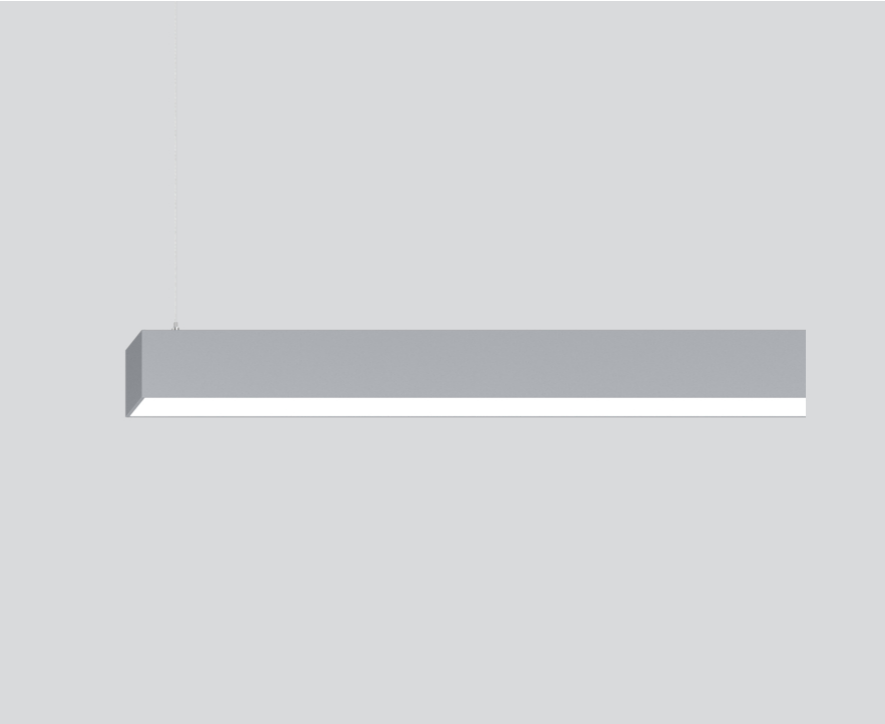

General

Techo , Suspendido

gris , RAL9006 ¹

IP20

indirecto 3980 lm

direct 5530 lm

total 9510 lm

4060 lm/m

LED

4000 K

IRC ≥ 80

L90 / 50000 h

MacAdam inicial ≤ 3 SDCM

MR 0.72

MDER 0.66

Óptico

Microprismatic

microprismatic

UGR < 19

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Eléctrico

DALI-2

220-240 V

sistema 82 W

CP1

sistema 116 lm/W³

1 DALI Addr.

35 W/m

Físico

cable 1500 mm

longitud 2352 mm


ancho 60 mm

altura 80 mm

6.4 kg

¹ Código RAL
² Valor del producto continente a plena carga (no atenuado)
³ incl. optical losses and the efficiency of the operating device (converter)

Distribución luminosa



Diseño del producto

