


LITO 60 direct / indirect

suspended

046-5225537Z



Proyecto / Tipo	
Notas	
Cantidad / Fecha	

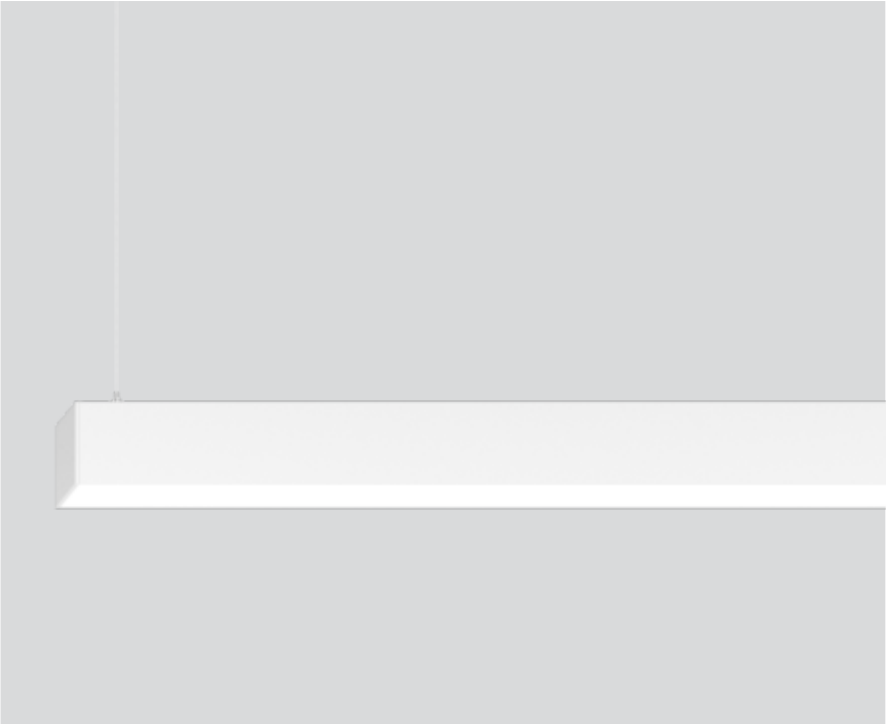

General

Techo , Suspendido
blanco , RAL 9010 ¹
IP20
indirecto 2350 lm
direct 3260 lm
total 5610 lm
3810 lm/m

LED

3000 K
IRC ≥ 80
L90 / 50000 h
MacAdam inicial ≤ 3 SDCM
MR 0.54
MDER 0.49

Óptico

Microprismatic
microprismatic
UGR ≤ 19
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²


Eléctrico

DALI-2
220-240 V
sistema 51 W
sistema 110 lm/W ³
CP1
1 DALI Addr.
35 W/m

Físico

cable 1500 mm
longitud 1480 mm
ancho 60 mm
altura 80 mm
4.2 kg

Distribución luminosa



Diseño del producto

