



reddot winner 2020

JANE

semi-recessed / surface / suspended


EN Highly flexible light rope made of food grade silicone for creative and decorative design; extremely slim design (only 18 mm diameter); for wall-/ceiling surface mounting or suspended mounting (cable suspension, height adjustment without tools); completely homogeneously illuminated, matt surface; 360° light emission; energy-efficient LEDs with very good colour rendering; optionally with external converter for ceiling installation or suspended in combination with the light rope (available as an accessory)

ES Cable de luz altamente flexible de silicona alimentaria para un diseño creativo y decorativo; diseño extremadamente esbelto (solo 18 mm de diámetro); para montaje sobre pared/techo o suspendido (suspensión por cable, ajuste de altura sin herramienta); superficie mate de iluminación totalmente homogénea; 360° de emisión; LEDs de alta eficiencia que proporcionan una alta reproducción cromática; convertidor externo opcional para integración en techo o suspendido en combinación con el cable de luz (disponible como accesorio)

Quickinfo

3000K, 4000K
CRI ≥ 90, 3 SDCM
up to 1000lm/m
up to 71lm/W
L80 @ 50000h
non DIM, DALI
IP 40

Types

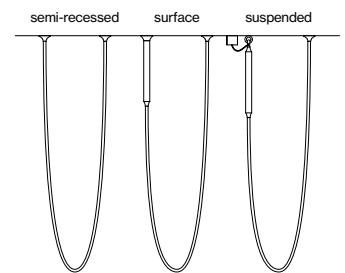

ø18 x 1000-10 000


Canopy colours



Light distribution




360°



many mounting options



dust and insect protection (IP40)



360° light emitting

Order options

COLOUR TEMPERATURE	☐☐
3000K	5
4000K	6


CONTROL	⬆️⬆️
non DIM	1
DALI	3

LENGTH	L
1000 mm	1
2000 mm	2
3000 mm	3
4000 mm	4
6000 mm	6
8000 mm	8
10000 mm	0

MATERIAL COLOUR	☑️
○ traffic white RAL 9016	7
● jet black RAL 9005	8



JANE semi-recessed / surface / suspended





LUMINAIRE

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14.4W/m	3000K	812lm/m	058-651 L::10
	4000K	1000lm/m	

Mounting accessories

MOUNTING ACCESSORIES


TYPE	L-W-H (mm)	ORDER CODE
1 mounting set recessed	ø74-100	058-659021 ☑️
2 mounting set surface	ø74-39	058-659101 ☑️
3 mounting set suspended	ø50/30-135	058-659201 ☑️
4 clip surface (transparent)	15-21-24	058-6591410
5 channel surface (transparent)	1000-21-24	058-6591110
6 mounting ring surface	ø39-9-61	058-659161 ☑️
7 mounting ring suspended	ø39-9	058-659261 ☑️

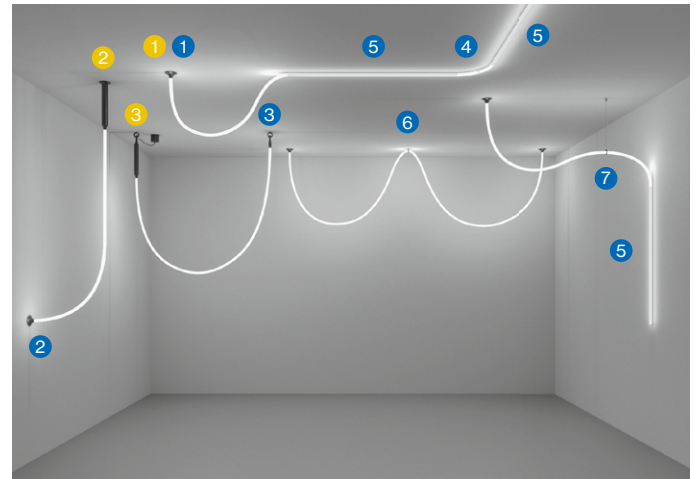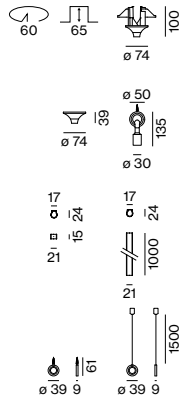


various mounting options with different mounting accessories

Electrical accessories

1 POWER SUPPLY RECESSED 220-240 V AC, 48V, 50-60Hz			
TYPE	L-W-H (mm)	ORDER CODE	
100 W recessed ☐ PC II	350-30-18	002-62134	
150 W recessed ☐ PC II	350-30-18	002-62135	
60 W revision opening ☐ PC II	163-43-32	002-62133	
100 W revision opening ☐ PC II	350-30-18	002-62134	
150 W revision opening ☐ PC II	350-30-18	002-62135	
250 W revision opening ☐ PC II	400-40-22	002-62139	
320 W revision opening ☐ PC I	252-90-44	002-60320	
DALI device	120-30-22	058-6599330	

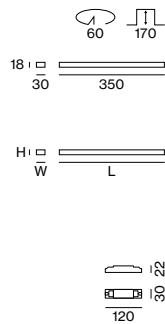

2 POWER SUPPLY SURFACE 220-240 V AC, 48V, 50-60Hz			
TYPE	L-ø (mm)	ORDER CODE	
100 W surface ☐ PC II	584-ø40	058-65912 ☑️☑️	
150 W surface ☐ PC II	584-ø40	058-65913 ☑️☑️	



3 POWER SUPPLY SUSPENDED 220-240 V AC, 48V, 50-60Hz			
TYPE	L-ø (mm)	ORDER CODE	
100 W suspended ☐ PC II	639-ø40	058-65922 ☑️☑️	
150 W suspended ☐ PC II	639-ø40	058-65923 ☑️☑️	

incl. ceiling canopy and 2000mm power cable

LUMINOUS FLUX value calculated for CRI ≥ 90, colour white, rope silicone