

## SASSO 60 round

recessed


**EN** Round recessed spotlight; installation without tools in mounting set (trimless or with trim) with ball catch system; surface lacquered; installation possible in different housings; choice of adjustable / fixed symmetric or asymmetric radiation characteristic; variants with symmetric radiation characteristic: precise radiation characteristic due to high quality lens system; variants with asymmetric radiation characteristic: high-quality reflector with micro-faceted, aluminum-vaporised surface; COB (Chip on Board) technology for maximum efficiency (ADJUSTABLE and DOWNLIGHT); no multiple shadows; efficient LEDs with very good colour rendering

**ES** Proyector empotrable redondo; instalación sin herramientas mediante kit de montaje (con o sin marco) con sistema inserción de bola; superficie lacada; posibilidad de instalar distintas carcasas; elección de la característica de radiación; ajustable o fija simétrica o asimétrica; variantes de radiación simétrica: proyección precisa con óptica de lente de alta calidad; variantes con emisión asimétrica: reflector de alta calidad con superficie de múltiples facetas revestida con aluminio por vaporización; Chip on Board que proporciona una máxima eficiencia (ADJUSTABLE y DOWNLIGHT); no sombras múltiples; LEDs de eficiencia que proporcionan una alta reproducción cromática

### Quickinfo

2700 K, 3000 K, 4000 K, CWD  
 CRI ≥ 90, 2 SDCM  
 up to 107lm/W  
 L80 @ 50000 h  
 non DIM, DALI-2  
 ↓ IP44/↑ IP20

### Types



### Housing colours



### Inset colours



### Light distributions




rotatable 360°,  
tiltable 30°




wallwasher and  
ww floor inset



glare control  
(UGR ≤ 16)



60 mm  
recess depth



CWD  
1800–3000 K

### Order options

#### COLOUR TEMPERATURE

2700K	4
3000K	5
4000K	6
CWD 1800-3000K*	

\*only for DALI-2; not for DIN-RAIL LDT Driver

#### INSET COLOUR

○ traffic white RAL 9016 (UGR <sub>≤22</sub> )	7
● matt silver (UGR <sub>≤19</sub> )	4
● jet black RAL 9005 (UGR <sub>≤16</sub> )	1
● gold dust RAL 260-M (UGR <sub>≤19</sub> )	9

#### BEAM ANGLE

spot 11°*	S
medium 21°	M
flood 42°	F
wide flood 54°*	W

\*not available for CWD

### Options on request

#### COLOR RENDERING INDEX

CRI ≥ 95, 2 SDCM

#### CONTROL



Casambi

#### MOUNTING SET

acoustic soft ceilings

#### POWER SUPPLY

DIM 1-10 V



### SASSO 60 round



#### ADJUSTABLE (↓ IP 40 | ↑ IP 20)

INSET POWER	LUMINOUS FLUX	ORDER CODE
10.7W 36 Vf 300mA	1040lm	0 4 8 - 2 6 2 2 :: 1 ▣ ▲
10.4W 35 Vf 300mA	CWD 796lm	0 4 8 - 2 6 2 2 E 1 ▣ ▲

#### DOWNLIGHT (↓ IP 40/44 | ↑ IP 20)

INSET POWER	LUMINOUS FLUX	ORDER CODE
10.7W 36 Vf 300mA	↓ IP 44 1070lm	0 4 8 - 2 6 0 2 :: 1 ▣ ▲
10.4W 35 Vf 300mA	↓ IP 40 CWD 808lm	0 4 8 - 2 6 0 2 E 1 ▣ ▲



#### WALLWASHER (IP 20)

INSET POWER	LUMINOUS FLUX	ORDER CODE
8.2W 27 Vf 300mA	635lm	0 4 8 - 2 6 4 1 :: 1 ▣ ▲

#### WALLWASHER/FLOOR (IP 20)

INSET POWER	LUMINOUS FLUX	ORDER CODE
8.2W 27 Vf 300mA	633lm	0 4 8 - 2 6 4 1 :: 1 ▣ W

### Mounting accessories

#### TRIMLESS MOUNTING SET for plasterboard ceilings 12.5/15/25mm

COLOUR	ORDER CODE
○ traffic white RAL9016	0 4 8 - 2 6 9 6 1 1 7

#### MOUNTING SET WITH TRIM for intermediate ceilings 2-25mm


TYPE	COLOUR	ORDER CODE
1 lamp	● white aluminium RAL 9006	0 4 8 - 2 6 9 6 3 1 G
	○ traffic white RAL9016	0 4 8 - 2 6 9 6 3 1 7
	● jet black RAL 9005	0 4 8 - 2 6 9 6 3 1 8
2 lamps	● white aluminium RAL 9006	0 4 8 - 2 6 9 8 3 1 G
	○ traffic white RAL9016	0 4 8 - 2 6 9 8 3 1 7
	● jet black RAL 9005	0 4 8 - 2 6 9 8 3 1 8

#### CONCRETE MOUNTING HOUSING

TYPE	L-W-H (mm)	ORDER CODE
exposed concrete ceilings	230-230-162	0 4 8 - 2 6 9 5 2 1 0
primed concrete ceilings*	614-307-120	0 4 8 - 2 6 9 5 1 1 0

\*order mounting set separately, not applicable for 2 lamps mounting set with trim

### Light distributions

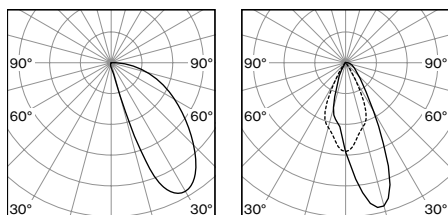

wallwasher

wallwasher floor

**INSET POWER** is the current consumption excluding any ballast  
**LUMINOUS FLUX** value calculated for 3000K, CRI ≥ 90, colour white, flood 2700K -5%, 4000K +5%

### Electrical accessories

#### POWER SUPPLY 220-240 V AC, 50-60Hz, □ PC II

TYPE	EFFICIENCY	L-W-H (mm)	ORDER CODE
300mA   non DIM	η 85%	85-40-22	0 0 2 - 9 0 7 7 1
300mA   DALI-2	η 88%	143-43-30	0 0 2 - 9 0 7 6 2

#### DIN RAIL COMPONENTS

TYPE	W-H-D (mm)	ORDER CODE
POWER SUPPLY 220-240 V AC	72-90-63	0 0 5 - 6 5 2 0 2 1 0
160W   48V DC constant voltage		
LED DRIVER DALI-2 DT6 1-2 addr.	36-88-59	0 0 5 - 6 1 2 1 0 3 0
200-1050mA settable const. current		
2 × 42W   48V DC   U <sub>OUT</sub> 10-40V		

for more details and components see page 981