

SASSO 60 square downlight

trim 2 lamps

048-2612114F 048-269931G 002-90742



Proyecto / Tipo

Notas

Cantidad / Fecha



↑ IP20
↓ IP44

220-240V

X-PERT

UGR
≤ 19

cd/m²
≤ 3000

CRI
≥ 90

X-PERT

General

Techo , Empotrado

plata mate

Set de montaje aluminio blanco

parte delantera IP44 , parte trasera IP20

2020 lm

LED

4000 K

IRC ≥ 90

L80 / 50000 h

MacAdam inicial ≤ 2 SDCM

R_g: 98 , R_f: 90 , R_{t(1-15)}: 88

MR 0.8

MDER 0.72

Óptico

flood

beam angle 42°

UGR < 19 , ≥ 65° < 3000 cd/m²

PstLM ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Eléctrico

non attenuable

20.1 W

inserto 8.5 W

36 V_f

250 mA

total de insertos 17.1 W

CP2 220-240V

100 lm/W

inserto 118 lm/W

Físico

borde

length 147 mm

width 81 mm

altura 48 mm

0.28 kg

Orificio

length 138 mm

width 73 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 90 mm

¹ Valor del producto continente a plena carga (no atenuado)

Distribución luminosa



Diseño del producto

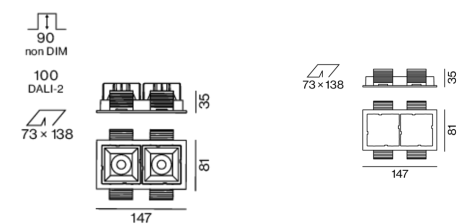

Instrucciones de montaje



Calculadora de iluminación

