

SASSO 60 square downlight

trim 2 lamps

048-2612914S 048-269931G 002-90746



Proyecto / Tipo

Notas

Cantidad / Fecha



↑ P20
↓ P44

220-240V

X-PERT

UGR
≤16

cd/m²
≤1500

CRI
≥90

MACADAM
100

X-PERT

General

Techo , Empotrado

plata mate

Set de montaje aluminio blanco

parte delantera IP44 , parte trasera IP20

1190 lm

LED

2700 K

IRC ≥ 90

MacAdam inicial ≤ 2 SDCM

R_g: 97 , R_f: 91 , R₍₁₋₅₎: 87

MR 0.52

MDER 0.47

Óptico

spot

beam angle 12°

UGR < 16 , ≥65° <1500 cd/m²

PstLM ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Eléctrico

DALI-2

20.8 W

inserto 8.8 W

36 Vf

250 mA

total de insertos 17.7 W

CP2 220-240V

57 lm/W

inserto 67 lm/W

1 DALI Addr.

Físico

borde

length 147 mm

width 81 mm

altura 48 mm

0.34 kg

Orificio

length 138 mm

width 73 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

¹ Valor del producto continente a plena carga (no atenuado)

Distribución luminosa



Diseño del producto

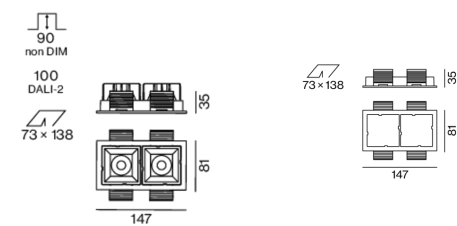

Instrucciones de montaje



Calculadora de iluminación

