

# SASSO 60 square downlight

trim 2 lamps

048-2612114S 048-2699318 002-90746



Proyecto / Tipo

Notas

Cantidad / Fecha



↑ #20  
↓ #44

220-240V

XPERT

UGR  
≤16

cd/m²  
≤1500

CRI  
≥90

MACADAM

XPERT

### General

Techo , Empotrado

plata mate

Set de montaje negro intenso

parte delantera IP44 , parte trasera IP20

1290 lm

### LED

4000 K

IRC ≥ 90

MacAdam inicial ≤ 2 SDCM

R<sub>g</sub>: 98 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 88

MR 0.8

MDER 0.72

### Óptico

spot

beam angle 12°

UGR < 16 , ≥65° <1500 cd/m²

PstLM ≤ 1.0 <sup>1</sup>

SVM ≤ 0.4 <sup>1</sup>

### Eléctrico

DALI-2

20.8 W

inserto 8.8 W

36 Vf

250 mA

total de insertos 17.7 W

CP2 220-240V

62 lm/W

inserto 73 lm/W

1 DALI Addr.

### Físico

borde

length 147 mm

width 81 mm

altura 48 mm

0.34 kg

### Orificio

length 138 mm

width 73 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

<sup>1</sup> Valor del producto continente a plena carga (no atenuado)

### Distribución luminosa



### Diseño del producto

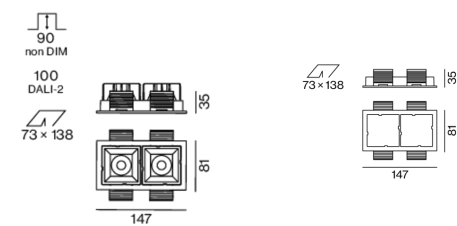

### Instrucciones de montaje



### Calculadora de iluminación

