

# LINEA system

wall


**EN** Luminaire housing and front cover from extruded aluminium profile, angular version; no visible screws; designed for continuous lighting systems, 90° angle connectors for flexible system design; surface powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; HPO (High Performance Opal) cover for uniform illumination; or with specially computed, asymmetrical lens for homogeneous lighting intensity (installation optionally for floor or ceiling illumination); energy-efficient LEDs with very good colour rendering; optionally JUST 26 spotlight module can be installed

**FR** Corps de luminaire et cache avant en profil extrudé en aluminium, version à bords en arête ; aucune vis visible ; conçu pour systèmes d'éclairage continus, équerres de raccordement 90° pour structure de système flexible ; surface thermolaquée ; convient à un montage mural ; éclairage homogène du mur ou du plafond par une distribution de lumière uniforme directe/indirecte ; cache HPO (High Performance Opal) pour éclairage homogène ; ou avec lentille spécialement calculée et asym. pour des intensités lum. homogènes (montage au choix pour éclairage du sol ou du plafond) ; LED économes en énergie à restitution de couleur élevée ; insert de spot JUST 26 montable au choix

## Quickinfo

3000 K, 4000 K, TW  
 CRI ≥ 90, 3 SDCM  
 up to 120 lm/W  
 up to 3670 lm/m  
 L85 @ 50 000 h  
 non DIM, DALI-2

## Types



## Colours




## Light distributions



asym./opal/ opal/  
 opal opal spot



single luminaire  
 (p. 634)



CRI ≥ 98  
 XPECTRUM

## Order options

### COLOUR TEMPERATURE

3000K	5
4000K	6
tunable white 2700–5000K*	D

\*available from L 1206 mm | DALI-2 DT8

### CONTROL

non DIM	1
DALI-2	3

### MATERIAL COLOUR

○ pure white RAL 9010	7
● jet black RAL 9005	8

### SPOTLIGHT ALIGNMENT

left	B
right	C

spotlight(s) only with 3000K

## Options on request

### COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM

### COLOUR TEMPERATURE

2700K

### MATERIAL COLOUR

special colours


## LINEA system wall




### ↓ OPAL HIGH PERFORMANCE / ↑ OPAL HIGH PERFORMANCE




SYS. POWER	LUMINOUS FLUX	L (mm)	ORDER CODE
9.7 W	↓ 428 / ↑ 428 lm	306	058-61411::↓↑AH
17.6 W	↓ 881 / ↑ 881 lm	606	058-6142::↓↑AH
35 W	↓ 1760 / ↑ 1760 lm	1206	058-6144::↓↑AH
42 W TW	↓ 2020 / ↑ 2020 lm		
70 W	↓ 3490 / ↑ 3520 lm	2406	058-6148::↓↑AH
83 W TW	↓ 4030 / ↑ 4030 lm		
35 W	↓ 1760 / ↑ 1760 lm	633x633	058-61111::↓↑AH
42 W TW	↓ 2020 / ↑ 2020 lm	inner corner	
35 W	↓ 1760 / ↑ 1760 lm	637x637	058-6112::↓↑AH
42 W TW	↓ 2020 / ↑ 2020 lm	outer corner	




### ↓ OPAL HIGH PERFORMANCE / ↑ ASYMMETRIC



SYS. POWER	LUMINOUS FLUX	L (mm)	ORDER CODE
9.7 W	↓ 428 / ↑ 509 lm	306	058-61411::↓↑AA
17.6 W	↓ 881 / ↑ 1050 lm	606	058-6142::↓↑AA
35 W	↓ 1760 / ↑ 2090 lm	1206	058-6144::↓↑AA
42 W TW	↓ 2020 / ↑ 2400 lm		
70 W	↓ 3490 / ↑ 4190 lm	2406	058-6148::↓↑AA
83 W TW	↓ 4030 / ↑ 4790 lm		
35 W	↓ 1760 / ↑ 2090 lm	633x633	058-61111::↓↑AA
42 W TW	↓ 2020 / ↑ 2400 lm	inner corner	
35 W	↓ 1760 / ↑ 2090 lm	637x637	058-6112::↓↑AA
42 W TW	↓ 2020 / ↑ 2400 lm	outer corner	



### ↓↑ OPAL HIGH PERFORMANCE / 1 SPOTLIGHT



SYSTEM POWER	LUMINOUS FLUX	L (mm)	ORDER CODE
17.6 W / 1 × 2,6 W	↓↑ 1762 / 1 × 159 lm	706	058-6142::↓↑AH
35 W / 1 × 2,6 W	↓↑ 3520 / 1 × 159 lm	1306	058-6144::↓↑AH
42 W TW / 1 × 2,6 W	↓↑ 4040 / 1 × 159 lm		
70 W / 1 × 2,6 W	↓↑ 6980 / 1 × 159 lm	2506	058-6148::↓↑AH
83 W TW / 1 × 2,6 W	↓↑ 8060 / 1 × 159 lm		

spotlight alignment left or right

## Accessories

### END CAPS

TYPE	ORDER CODE
end caps (pair)	050-254010




### CONNECTOR

TYPE	ORDER CODE
linear connector (1 piece)	050-2551100
linear connector (10 pieces)	050-2551100.10



## Light distributions

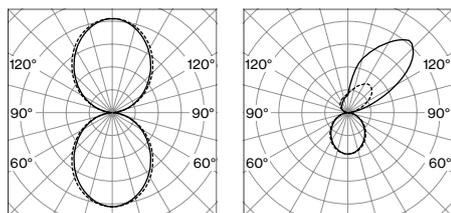

↓ opal high performance  
↑ opal high performance

↓ opal high performance  
↑ asymmetric

LUMINOUS FLUX value calculated for  
3000K, CRI ≥ 90, colour white, 4000K +10%