

# BO 45 base surface 1 lamp


049-633051XS



Projet / Type \_\_\_\_\_

Notes \_\_\_\_\_

Quantité / Date \_\_\_\_\_

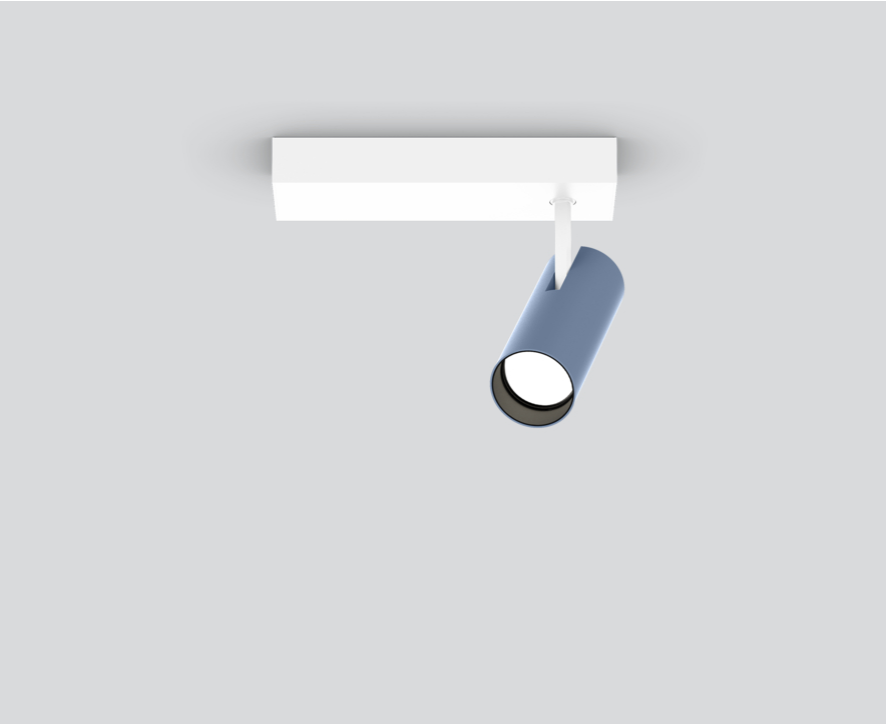

## Général

Plafond , Surface \_\_\_\_\_

inclinaison max 90° \_\_\_\_\_

rotation 350° \_\_\_\_\_

couleurs spéciales \_\_\_\_\_

IP20 \_\_\_\_\_

1110 lm \_\_\_\_\_

## LED

3000 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

MacAdam initial ≤ 3 SDCM \_\_\_\_\_

R<sub>g</sub>: 100 , R<sub>f</sub>: 91 , R<sub>f(1-5)</sub>: 88 \_\_\_\_\_

MR 0.59 \_\_\_\_\_

MDER 0.53 \_\_\_\_\_

## Optique

spot \_\_\_\_\_

angle de faisceau 12° \_\_\_\_\_

## Electrique

non DIM \_\_\_\_\_

système 15.0 W \_\_\_\_\_

CP1 220-240V \_\_\_\_\_

système 74 lm/W<sup>1</sup> \_\_\_\_\_

## Physique


longueur 180 mm \_\_\_\_\_

largeur 55 mm \_\_\_\_\_

hauteur 163 mm \_\_\_\_\_


0.5 kg \_\_\_\_\_

## Répartition de la lumière



h (m)	E0° (lx)	ø (m)
1	14000	0.21
2	3500	0.42
3	1600	0.63
4	900	0.84
5	600	1.06

## Dessin de fabrication



<sup>1</sup> incl. optical losses and the efficiency of the operating device (converter)

## Notice de montage



## Calculateur d'éclairage

