



## SASSO 60/100 round

wall


**EN** Cylindrical wall surface mounted luminaire made of aluminium, available in 2 sizes; light inset lacquered; housing powder coated; optionally symmetric direct or direct / indirect light distribution; homogeneous wall or ceiling illumination through uniform light distribution; precise radiation characteristic due to high quality lens system; installation of variant DIRECT optionally for floor or ceiling illumination; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; efficient LEDs with very good colour rendering

**FR** Applique cylindrique en aluminium pour montage en surface, disponible dans 2 tailles ; insert d'éclairage peint ; boîtier thermolaqué ; disponible au choix, en rayonnement symétrique direct ou direct/indirect ; éclairage homogène du mur ou du plafond par une distribution de lumière uniforme ; caractéristiques de rayonn. précises grâce à l'optique à lentille ; variante de montage DIRECT disponible au choix pour l'éclairage du sol ou du plafond ; Technologie COB (Chip on Board) pour efficacité maximale ; pas d'ombres multiples ; LED économes en énergie à restitution de couleur élevée

### Quickinfo

2700 K, 3000 K, 4000 K  
 CRI ≥ 90, 2 SDCM  
 SASSO 60 up to 69lm/W  
 SASSO 100 up to 61lm/W  
 L80 @ 50000h  
 non DIM, DALI-2

### Types

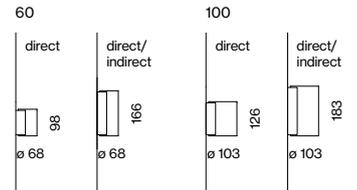


### Housing colours



### Inset colours



### Light distributions



direct and direct/  
indirect illumination



high quality  
lens



easy  
mounting



CRI ≥ 95  
2 SDCM

## Order options

### COLOUR TEMPERATURE

2700 K	4
3000 K	5
4000 K	6

### CONTROL

non DIM	1
DALI-2	3

### HOUSING COLOUR

<input type="radio"/> traffic white RAL 9016	7
<input checked="" type="radio"/> jet black RAL 9005	1

### INSET COLOUR

<input type="radio"/> traffic white RAL 9016 (UGR <sub>≤22</sub> )	7
<input type="radio"/> matt silver (UGR <sub>≤19</sub> )	4
<input checked="" type="radio"/> jet black RAL 9005 (UGR <sub>≤16</sub> )	1
<input type="radio"/> gold dust RAL 260-M (UGR <sub>≤19</sub> )	9

### BEAM ANGLE

opal lens

## Options on request

### COLOUR RENDERING INDEX

CRI ≥ 95, 2 SDCM



## SASSO 60 round wall



### DIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
11.7 W	2700 K	647 lm	0 4 8 - 3 1 5 0
	3000 K	683 lm	
	4000 K	724 lm	

### DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
20.4 W	2700 K	2 × 643 lm	0 4 8 - 3 1 6 0
	3000 K	2 × 678 lm	
	4000 K	2 × 720 lm	

## SASSO 100 round wall



### DIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
20.4 W	2700 K	1130 lm	0 4 8 - 3 4 5 0
	3000 K	1180 lm	
	4000 K	1240 lm	

### DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
41 W	2700 K	2 × 1130 lm	0 4 8 - 3 4 6 0
	3000 K	2 × 1180 lm	
	4000 K	2 × 1240 lm	