

SASSO 40 round wallwasher/floor

trim


048-2840414W 048-2896317 002-90743



Projet / Type

Notes

Quantité / Date

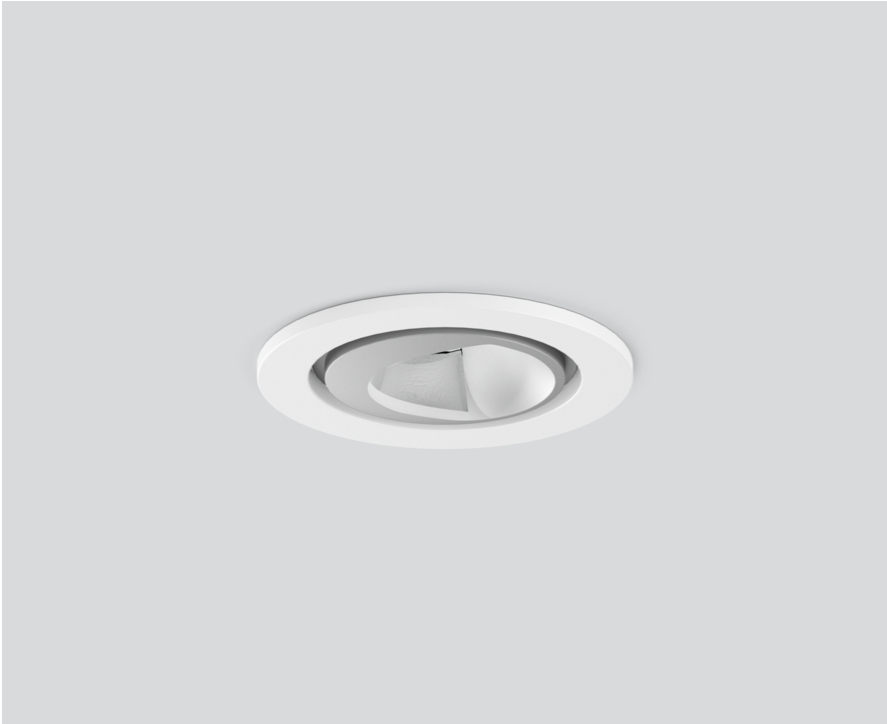

220-240V

X-PERT

CRI
≥ 90

X-PERT

Général

Plafond , Encastré

rotation 360°

argent mat

Set de montage blanc signalisation

IP20

609 lm

LED

2700 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 3 SDCM

R_g: 97 , R_f: 91 , R₍₁₋₁₅₎: 90

MR 0.53

MDER 0.48

Optique

wallwasher floor

beam angle 53°

PstLM ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Electrique

DALI-2

9.0 W

insert 6.8 W

27 Vf

250 mA

CP2 220-240V

68 lm/W

insert 90 lm/W

Physique

bord

diameter 60 mm

hauteur 51 mm

0.33 kg

Découpe

diameter 56 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 110 mm

¹ Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

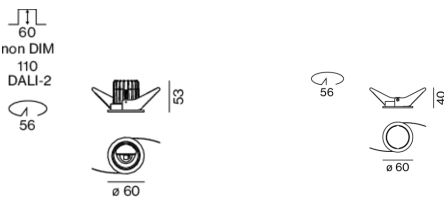

Notice de montage



Calculateur d'éclairage

