

SASSO 40 round downlight

trimless

048-2800611M 048-2896117 002-90745



Projet / Type

Notes

Quantité / Date



↑ IP20

↓ IP44

220-240V

↺

↻

X-PERT

UGR

≤ 16

CRI

≥ 90

X-PERT

Général

Plafond , Encastré

rotation 360°

noir , RAL9005 ¹

Set de montage blanc signalisation

avant IP44 , arrière IP20

453 lm

LED

4000 K

CRI ≥ 90

L85 / 50000 h

MacAdam initial ≤ 3 SDCM

R_g: 97 , R_f: 89 , R_{f(1-15)}: 91

MR 0.85

MDER 0.77

Optique

medium

beam angle 29°

UGR < 16

P_{stLM} ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

DALI-2

9.9 W

insert 7.5 W

36 Vf

200 mA

CP2 220-240V

46 lm/W

insert 61 lm/W

Physique

sans bord

diameter 56 mm

hauteur 50 mm

0.22 kg

Découpe


diameter 56 mm

recessed depth 120 mm


¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

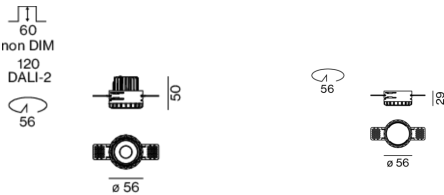

Notice de montage



Calculateur d'éclairage

