

SASSO 40 round downlight

trim

048-2800514S 048-2896318 002-90745



Projet / Type

Notes

Quantité / Date



↑ IP20
↓ IP44

220-240V

360°

X-PERT

UGR
≤13

CRI
≥90

X-PERT

Général

Plafond , Encastré

rotation 360°

argent mat

Set de montage Noir profond

avant IP44 , arrière IP20

456 lm

LED

3000 K

CRI ≥ 90

L85 / 50000 h

MacAdam initial ≤ 3 SDCM

R_g: 100 , R_f: 89 , R₍₁₋₁₅₎: 89

MR 0.56

MDER 0.51

Optique

spot

beam angle 17°

UGR < 13

P_{stLM} ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Electrique

DALI-2

9.9 W

insert 7.5 W

36 Vf

200 mA

CP2 220-240V

46 lm/W

insert 61 lm/W

Physique

bord

diameter 60 mm

hauteur 50 mm

0.2 kg

Découpe

diameter 56 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 110 mm

¹ Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

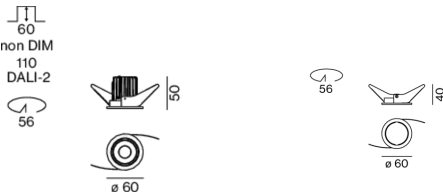

Notice de montage



Calculateur d'éclairage

