

SASSO 40 round downlight

trim

048-2800511S 048-2896318 002-90745



Projet / Type

Notes

Quantité / Date



IP20
IP44

220-240V

360°

X-PERT

UGR
≤13

CRI
≥90

X-PERT

Général

Plafond , Encastré

rotation 360°

noir , RAL9005 ¹

Set de montage Noir profond

avant IP44 , arrière IP20

441 lm

LED

3000 K

CRI ≥ 90

L85 / 50000 h

MacAdam initial ≤ 3 SDCM

R_g: 100 , R_f: 89 , R_(f-15): 89

MR 0.56

MDER 0.51

Optique

spot

beam angle 17°

UGR < 13

P_{stLM} ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

DALI-2

9.9 W

insert 7.5 W

36 Vf

200 mA

CP2 220-240V

45 lm/W

insert 59 lm/W

Physique

bord

diameter 60 mm

hauteur 50 mm

0.2 kg

Découpe

diameter 56 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 110 mm


¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

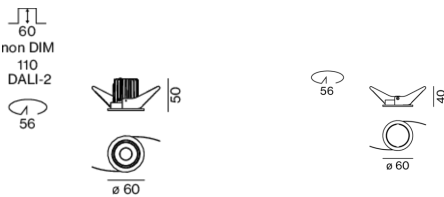

Notice de montage



Calculateur d'éclairage

