

SASSO 40 round downlight

trim

048-2800419S 048-2896317 002-90744



Projet / Type

Notes

Quantité / Date



Général

Plafond , Encastré
rotation 360°
or , RAL260-M ¹
Set de montage blanc signalisation
avant IP44 , arrière IP20
419 lm

LED

2700 K
CRI ≥ 90
L85 / 50000 h
MacAdam initial ≤ 3 SDCM
R_g: 100 , R_f: 89 , R_{f(1-5)}: 86
MR 0.49
MDER 0.44

Optique

spot
beam angle 17°
UGR < 13
P_{stLM} ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrique

non DIM
9.9 W
insert 7.5 W
36 Vf
200 mA
CP2 220-240V
42 lm/W
insert 56 lm/W

Physique

bord
diameter 60 mm
hauteur 50 mm
0.6 kg


Découpe

diameter 56 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 60 mm


¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

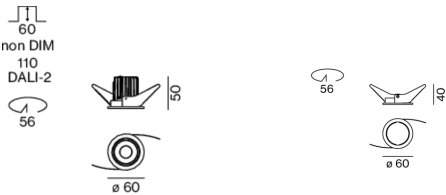

Notice de montage



Calculateur d'éclairage

