

SASSO 40 round downlight

trim

048-2800419M 048-2896317 002-90744



Projet / Type

Notes

Quantité / Date



Général

Plafond , Encastré

rotation 360°

or , RAL260-M ¹

Set de montage blanc signalisation

avant IP44 , arrière IP20

418 lm

LED

2700 K

CRI ≥ 90

L85 / 50000 h

MacAdam initial ≤ 3 SDCM

R_g: 100 , R_f: 89 , R₍₁₋₁₅₎: 86

MR 0.49

MDER 0.44

Optique

medium

beam angle 29°

UGR < 16 , ≥65° <1500 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

non DIM

9.9 W

insert 7.5 W

36 Vf

200 mA

CP2 220-240V

42 lm/W

insert 56 lm/W

Physique

bord

diameter 60 mm

hauteur 50 mm

0.6 kg

Découpe


diameter 56 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 60 mm

Répartition de la lumière



Dessin de fabrication

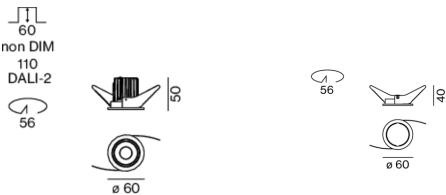

¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Notice de montage



Calculateur d'éclairage

