

SASSO 40 round downlight

trim

048-2800419F 048-2896318 002-90745



Projet / Type

Notes

Quantité / Date



↑ P20

↓ P44

220-240V

↺

↻

☀

XPEST

UGR

≤ 19

cd/m²

≤ 3000

CRI

≥ 90

XPEST

Général

Plafond , Encastré

rotation 360°

or , RAL260-M ¹

Set de montage Noir profond

avant IP44 , arrière IP20

392 lm

LED

2700 K

CRI ≥ 90

L85 / 50000 h

MacAdam initial ≤ 3 SDCM

R_g: 100 , R_f: 89 , R_{f(1-15)}: 86

MR 0.49

MDER 0.44

Optique

flood

beam angle 43°

UGR < 19 , ≥ 65° < 3000 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

DALI-2

9.9 W

insert 7.5 W

36 Vf

200 mA

CP2 220-240V

40 lm/W

insert 53 lm/W

Physique

bord

diameter 60 mm

hauteur 50 mm

0.2 kg

Découpe

diameter 56 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 110 mm

¹ Code RAL
² Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

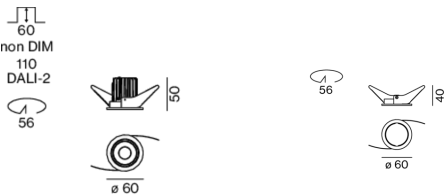

Notice de montage



Calculateur d'éclairage

