

SASSO 40 round downlight

trimless

048-2800417F 048-2896117 002-90745



Projet / Type

Notes

Quantité / Date



↑ IP20
↓ IP44

220-240V

360°

X-PERT

UGR
≤22

CRI
≥90

X-PERT

Général

Plafond , Encastré

rotation 360°

blanc , RAL9016 ¹

Set de montage blanc signalisation

avant IP44 , arrière IP20

429 lm

LED

2700 K

CRI ≥ 90

L85 / 50000 h

MacAdam initial ≤ 3 SDCM

R_g: 100 , R_f: 89 , R_(f-15): 86

MR 0.49

MDER 0.44

Optique

flood

beam angle 44°

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

DALI-2

9.9 W

insert 7.5 W

36 Vf

200 mA

CP2 220-240V

43 lm/W

insert 58 lm/W

Physique

sans bord

diameter 56 mm

hauteur 50 mm


0.22 kg

Découpe


diameter 56 mm

recessed depth 120 mm

Répartition de la lumière



Dessin de fabrication

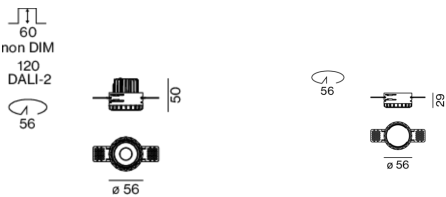

¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Notice de montage



Calculateur d'éclairage

